




Fenner



Taper-Lock® Dual Duty Pulleys

01

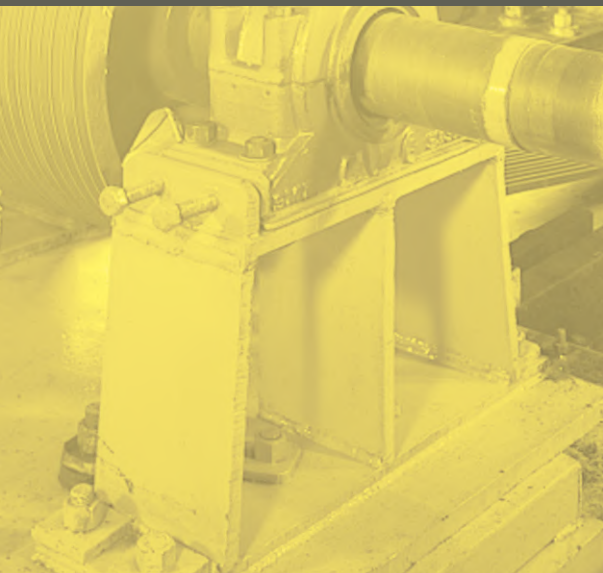


Fenner Taper-Lock® Dual Duty pulleys are India's first standard range of metric pulleys. They eliminate re boring and keywaying problems since each pulley need not be finished according to different bore and keyway requirements. With Taper-Lock® Bushes, changes in the diameter and position of pulleys are easily made. These metric pulleys are precision machined and have dual duty grooves to perfectly match Fenner "PB" Precision Built V-Belts as well as Fenner SpacesaVer Wedge Belts.

All Fenner pulleys are manufactured from superior quality cast iron in over 400 standard sizes- and also according to additional sizes against special requirements. Fenner metric pulleys conform to IS and ISO groove specifications and can transmit upto 250 KW of power at 1440 rpm with speed ratios upto 1 :7. Available with excellent pre -and post-sales service through the Fenner network of branches and dealers.

Fenner Taper-Lock® Bushes

When Fenner Taper-Lock® Bushes are used, it is possible for even an unskilled labourer to 'shrink fit' pulleys, couplings etc. on to shafts only with a hexagon wrench (Allen key).



The arrangement of half-threaded holes and longitudinally split tapered bushes ensure maximum grip and fast, easy fitting. Tightening of the screws into the threaded holes in the hub forces the bush into the taper bored components, thereby effectively contracting the bore of the Taper-Lock® Bush until the equivalent of a shrink fit is obtained. Taper-Lock® Bushes are suitable for metric shafts and can also be supplied with Imperial Bores and Keyways.


Advantages :

- No re-boring and keywaying costs.
- Saves time and cost in fitting.
- Eliminates precision taper fitting keys.
- 239 bush size/bore combinations are available.
- Interchangeable between many products.
- Taper bored components can be transferred to other diameter shafts by fitting alternative bore bushes.
- Convenience in dismantling for maintenance and component replacement.
- Accommodates shaft limits of +0.051 mm /-0.127mm.



The benefits of using Taper-Lock® Bushes can be extended to include components Which have a parallel bore by incorporating Taper-Lock® Adaptors, Taper-Lock® Bolt-on-Hubs or Taper-Lock® Weld-on-Hubs.

Pulley Types:

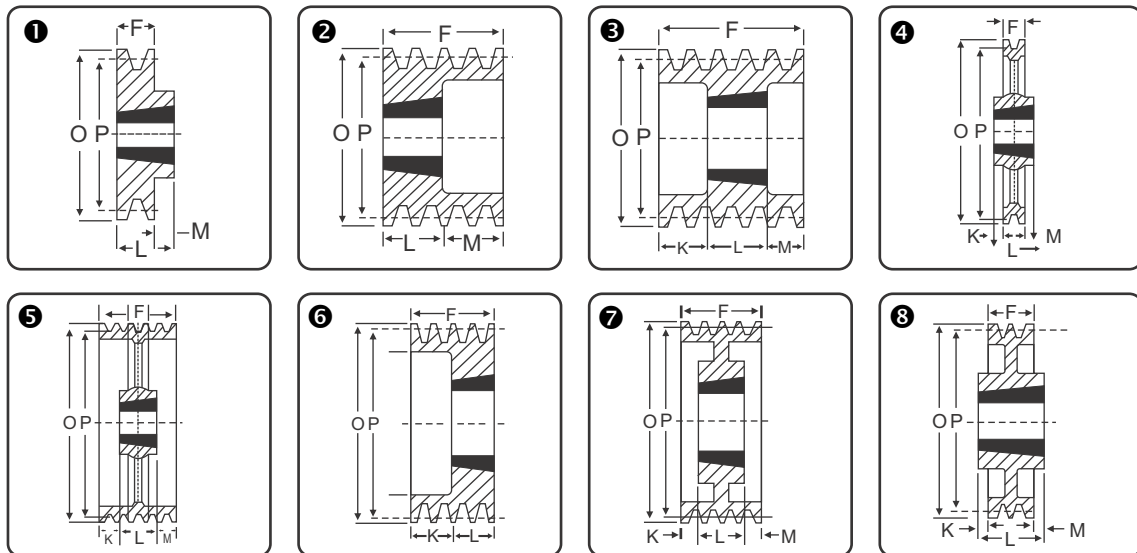

Recommended Minimum Pulley Pitch Diameters

| V / WEDGE BELT SECTION | A | B | C | SPZ | SPA | SPB | SPC |
|------------------------|----|-----|-----|-----|-----|-----|-----|
| | 80 | 125 | 200 | 56 | 90 | 160 | 224 |





Taper Lock Pulley Standard Range

For use with 'SPZ' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|--------|-------------|----|------|------|-----|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 001Z0067 | 67 | 1 | 1108 | 28 | 1 1/8" | 1 | 16 | - | 22.0 | 6.0 | 72.5 |
| 2Z0067 | | 2 | 1108 | 28 | 1 1/8" | 6 | 28 | 6.0 | 22.0 | - | |
| 3Z0067 | | 3 | 1108 | 28 | 1 1/8" | 6 | 40 | 18.0 | 22.0 | - | |
| 001Z0071 | 71 | 1 | 1108 | 28 | 1 1/8" | 1 | 16 | - | 22.0 | 6.0 | 76.5 |
| 2Z0071 | | 2 | 1108 | 28 | 1 1/8" | 6 | 28 | 6.0 | 22.0 | - | |
| 3Z0071 | | 3 | 1108 | 28 | 1 1/8" | 6 | 40 | 18.0 | 22.0 | - | |
| 001Z0075 | 75 | 1 | 1108 | 28 | 1 1/8" | 1 | 16 | - | 22.0 | 6.0 | 80.5 |
| 2Z0075 | | 2 | 1210 | 32 | 1 1/4" | 6 | 28 | 3.0 | 25.0 | - | |
| 3Z0075 | | 3 | 1210 | 32 | 1 1/4" | 6 | 40 | 15.0 | 25.0 | - | |
| 001Z0080 | 80 | 1 | 1210 | 32 | 1 1/4" | 1 | 16 | - | 25.0 | 9.0 | 85.5 |
| 2Z0080 | | 2 | 1210 | 32 | 1 1/4" | 6 | 28 | 3.0 | 25.0 | - | |
| 3Z0080 | | 3 | 1210 | 32 | 1 1/4" | 6 | 40 | 15.0 | 25.0 | - | |
| 4Z0080 | | 4 | 1210 | 32 | 1 1/4" | 6 | 52 | 27.0 | 25.0 | - | |
| 001Z0085 | 85 | 1 | 1210 | 32 | 1 1/4" | 1 | 16 | - | 25 | 9.0 | 90.5 |
| 2Z0085 | | 2 | 1610 | 42 | 1 5/8" | 6 | 28 | 3.0 | 25 | - | |
| 3Z0085 | | 3 | 1610 | 42 | 1 5/8" | 6 | 40 | 15.0 | 25 | - | |
| 4Z0085 | | 4 | 1610 | 42 | 1 5/8" | 6 | 52 | 27.0 | 25 | - | |
| 5Z0085 | | 5 | 1610 | 42 | 1 5/8" | 6 | 64 | 39.0 | 25 | - | |
| 001Z0090 | 90 | 1 | 1210 | 32 | 1 1/4" | 1 | 16 | - | 25 | 9.0 | 95.5 |
| 2Z0090 | | 2 | 1610 | 42 | 1 5/8" | 6 | 28 | 3.0 | 25 | - | |
| 3Z0090 | | 3 | 1610 | 42 | 1 5/8" | 6 | 40 | 15.0 | 25 | - | |
| 4Z0090 | | 4 | 1610 | 42 | 1 5/8" | 6 | 52 | 27.0 | 25 | - | |
| 5Z0090 | | 5 | 1610 | 42 | 1 5/8" | 6 | 64 | 39.0 | 25 | - | |
| 6Z0090 | | 6 | 1610 | 42 | 1 5/8" | 6 | 76 | 51.0 | 25 | - | |
| 001Z0095 | 95 | 1 | 1210 | 32 | 1 1/4" | 1 | 16 | - | 25 | 9.0 | 100.5 |
| 2Z0095 | | 2 | 1610 | 42 | 1 5/8" | 6 | 28 | 3.0 | 25 | - | |
| 3Z0095 | | 3 | 1610 | 42 | 1 5/8" | 6 | 40 | 15.0 | 25 | - | |
| 4Z0095 | | 4 | 1610 | 42 | 1 5/8" | 6 | 52 | 27.0 | 25 | - | |
| 5Z0095 | | 5 | 1610 | 42 | 1 5/8" | 6 | 64 | 39.0 | 25 | - | |
| 6Z0095 | | 6 | 1610 | 42 | 1 5/8" | 6 | 76 | 51.0 | 25 | - | |
| 001Z0100 | 100 | 1 | 1210 | 32 | 1 1/4" | 1 | 16 | - | 25 | 9.0 | 105.5 |
| 2Z0100 | | 2 | 1610 | 42 | 1 5/8" | 6 | 28 | 3.0 | 25 | - | |
| 3Z0100 | | 3 | 1610 | 42 | 1 5/8" | 6 | 40 | 15.0 | 25 | - | |
| 4Z0100 | | 4 | 2012 | 50 | 2" | 6 | 52 | 20.0 | 32 | - | |
| 5Z0100 | | 5 | 2012 | 50 | 2" | 6 | 64 | 32.0 | 32 | - | |
| 6Z0100 | | 6 | 2012 | 50 | 2" | 6 | 76 | 44.0 | 32 | - | |
| 001Z0112 | 112 | 1 | 1610 | 42 | 1 5/8" | 1 | 16 | - | 25 | 9.0 | 117.5 |
| 2Z0112 | | 2 | 1610 | 42 | 1 5/8" | 6 | 28 | 3.0 | 25 | - | |
| 3Z0112 | | 3 | 2012 | 50 | 2" | 6 | 40 | 8.0 | 32 | - | |
| 4Z0112 | | 4 | 2012 | 50 | 2" | 6 | 52 | 20.0 | 32 | - | |
| 5Z0112 | | 5 | 2012 | 50 | 2" | 6 | 64 | 32.0 | 32 | - | |
| 6Z0112 | | 6 | 2012 | 50 | 2" | 6 | 76 | 44.0 | 32 | - | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'SPZ' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|--------|-------------|----|------|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 001Z0125 | 125 | 1 | 1610 | 42 | 1 5/8" | 1 | 16 | - | 25 | 9.0 | 130.5 |
| 2Z0125 | | 2 | 1610 | 42 | 1 5/8" | 6 | 28 | 3.0 | 25 | - | |
| 3Z0125 | | 3 | 2012 | 50 | 2" | 6 | 40 | 8.0 | 32 | - | |
| 4Z0125 | | 4 | 2012 | 50 | 2" | 6 | 52 | 20.0 | 32 | - | |
| 5Z0125 | | 5 | 2517 | 60 | 2 1/2" | 6 | 64 | 19.0 | 45 | - | |
| 6Z0125 | | 6 | 2517 | 60 | 2 1/2" | 6 | 76 | 31.0 | 45 | - | |
| 001Z0140 | 140 | 1 | 1610 | 42 | 1 5/8" | 1 | 16 | - | 25 | 9.0 | 145.5 |
| 2Z0140 | | 2 | 1610 | 42 | 1 5/8" | 6 | 28 | 3.0 | 25 | - | |
| 3Z0140 | | 3 | 2012 | 50 | 2" | 2 | 40 | - | 32 | 8.0 | |
| 4Z0140 | | 4 | 2012 | 50 | 2" | 2 | 52 | - | 32 | 20.0 | |
| 5Z0140 | | 5 | 2517 | 60 | 2 1/2" | 2 | 64 | - | 45 | 19.0 | |
| 6Z0140 | | 6 | 2517 | 60 | 2 1/2" | 2 | 76 | - | 45 | 31.0 | |
| 001Z0160 | 160 | 1 | 1610 | 42 | 1 5/8" | 1 | 16 | - | 25 | 9.0 | 165.5 |
| 2Z0160 | | 2 | 2012 | 50 | 2" | 1 | 28 | - | 32 | 4.0 | |
| 3Z0160 | | 3 | 2012 | 50 | 2" | 2 | 40 | - | 32 | 8.0 | |
| 4Z0160 | | 4 | 2517 | 60 | 2 1/2" | 2 | 52 | - | 45 | 7.0 | |
| 5Z0160 | | 5 | 2517 | 60 | 2 1/2" | 2 | 64 | - | 45 | 19.0 | |
| 6Z0160 | | 6 | 2517 | 60 | 2 1/2" | 2 | 76 | - | 45 | 31.0 | |
| 001Z0180 | 180 | 1 | 1610 | 42 | 1 5/8" | 1 | 16 | - | 25 | 9.0 | 185.5 |
| 2Z0180 | | 2 | 2012 | 50 | 2" | 1 | 28 | - | 32 | 4.0 | |
| 3Z0180 | | 3 | 2012 | 50 | 2" | 2 | 40 | - | 32 | 8.0 | |
| 4Z0180 | | 4 | 2517 | 60 | 2 1/2" | 2 | 52 | - | 45 | 7.0 | |
| 5Z0180 | | 5 | 2517 | 60 | 2 1/2" | 2 | 64 | - | 45 | 19.0 | |
| 6Z0180 | | 6 | 2517 | 60 | 2 1/2" | 2 | 76 | - | 45 | 31.0 | |
| 001Z0200 | 200 | 1 | 2012 | 50 | 2" | 1 | 16 | - | 32 | 16.0 | 205.5 |
| 2Z0200 | | 2 | 2012 | 50 | 2" | 1 | 28 | - | 32 | 4.0 | |
| 3Z0200 | | 3 | 2012 | 50 | 2" | 2 | 40 | - | 32 | 8.0 | |
| 4Z0200 | | 4 | 2517 | 60 | 2 1/2" | 3 | 52 | 3.5 | 45 | 3.5 | |
| 5Z0200 | | 5 | 2517 | 60 | 2 1/2" | 7 | 64 | 9.5 | 45 | 9.5 | |
| 6Z0200 | | 6 | 2517 | 60 | 2 1/2" | 7 | 76 | 15.5 | 45 | 15.5 | |
| 001Z0250 | 250 | 1 | 2012 | 50 | 2" | 4 | 16 | 8.0 | 32 | 8.0 | 255.5 |
| 2Z0250 | | 2 | 2012 | 50 | 2" | 4 | 28 | 2.0 | 32 | 2.0 | |
| 3Z0250 | | 3 | 2012 | 50 | 2" | 5 | 40 | 4.0 | 32 | 4.0 | |
| 4Z0250 | | 4 | 2517 | 60 | 2 1/2" | 7 | 52 | 3.5 | 45 | 3.5 | |
| 5Z0250 | | 5 | 2517 | 60 | 2 1/2" | 5 | 64 | 9.5 | 45 | 9.5 | |
| 6Z0250 | | 6 | 2517 | 60 | 2 1/2" | 5 | 76 | 15.5 | 45 | 15.5 | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'SPZ' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|----|------|-----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 001Z0315 | 315 | 1 | 2012 | 50 | 2" | 4 | 16 | 8.0 | 32 | 8.0 | 320.5 |
| 2Z0315 | | 2 | 2012 | 50 | 2" | 4 | 28 | 2.0 | 32 | 2.0 | |
| 3Z0315 | | 3 | 2517 | 60 | 2 ½" | 8 | 40 | 2.5 | 45 | 2.5 | |
| 4Z0315 | | 4 | 2517 | 60 | 2 ½" | 5 | 52 | 3.5 | 45 | 3.5 | |
| 5Z0315 | | 5 | 2517 | 60 | 2 ½" | 5 | 64 | 9.5 | 45 | 9.5 | |
| 6Z0315 | | 6 | 2517 | 60 | 2 ½" | 5 | 76 | 15.5 | 45 | 15.5 | |
| 001Z0400 | 400 | 1 | 2012 | 50 | 2" | 4 | 16 | 8.0 | 32 | 8.0 | 405.5 |
| 2Z0400 | | 2 | 2517 | 60 | 2 ½" | 4 | 28 | 8.5 | 45 | 8.5 | |
| 3Z0400 | | 3 | 2517 | 60 | 2 ½" | 4 | 40 | 2.5 | 45 | 2.5 | |
| 4Z0400 | | 4 | 2517 | 60 | 2 ½" | 5 | 52 | 3.5 | 45 | 3.5 | |
| 5Z0400 | | 5 | 3020 | 75 | 3" | 5 | 64 | 6.5 | 51 | 6.5 | |
| 6Z0400 | | 6 | 3030 | 75 | 3" | 4 | 76 | - | 76 | - | |
| 002Z0500 | 500 | 2 | 2517 | 60 | 2 ½" | 4 | 28 | 8.5 | 45 | 8.5 | 505.5 |
| 3Z0500 | | 3 | 2517 | 60 | 2 ½" | 4 | 40 | 2.5 | 45 | 2.5 | |
| 4Z0500 | | 4 | 3020 | 75 | 3" | 5 | 52 | 0.5 | 51 | 0.5 | |
| 5Z0500 | | 5 | 3020 | 75 | 3" | 5 | 64 | 6.5 | 51 | 6.5 | |
| 6Z0500 | | 6 | 3030 | 75 | 3" | 4 | 76 | - | 76 | - | |
| 003Z0630 | | 630 | 3 | 2517 | 60 | 2 ½" | 4 | 40 | 2.5 | 45 | |
| 4Z0630 | 4 | | 3020 | 75 | 3" | 5 | 52 | 0.5 | 51 | 0.5 | |
| 5Z0630 | 5 | | 3030 | 75 | 3" | 4 | 64 | 6.0 | 76 | 6.0 | |
| 6Z0630 | 6 | | 3535 | 90 | 3 ½" | 4 | 76 | 6.5 | 89 | 6.5 | |
| 003Z0800 | 800 | 3 | 3030 | 75 | 3" | 4 | 40 | 18.0 | 76 | 18.0 | 805.5 |
| 4Z0800 | | 4 | 3030 | 75 | 3" | 4 | 52 | 12.0 | 76 | 12.0 | |
| 5Z0800 | | 5 | 3535 | 90 | 3 ½" | 4 | 64 | 12.5 | 89 | 12.5 | |
| 6Z0800 | | 6 | 3535 | 90 | 3 ½" | 4 | 76 | 6.5 | 89 | 6.5 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'A' / 'SPA' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|---|--------------|----------------|----------|-----------|--------|-------------|----|------|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| For use with 'A' Section Belts | | | | | | | | | | | |
| 001A0067 | 67 | 1 | 1108 | 28 | 1 1/8" | 1 | 20 | | 22 | 2.0 | 72.5 |
| 002A0067 | 67 | 2 | 1108 | 28 | 1 1/8" | 6 | 35 | 13.0 | 22 | | |
| 001A0071 | 71 | 1 | 1108 | 28 | 1 1/8" | 1 | 20 | | 22 | 2.0 | 76.5 |
| 002A0071 | 71 | 2 | 1108 | 28 | 1 1/8" | 6 | 35 | 13.0 | 22 | | |
| 003A0071 | 71 | 3 | 1108 | 28 | 1 1/8" | 6 | 50 | 28.0 | 22 | | |
| 001A0075 | 75 | 1 | 1108 | 28 | 1 1/8" | 1 | 20 | | 22 | 2.0 | 80.5 |
| 002A0075 | 75 | 2 | 1108 | 28 | 1 1/8" | 6 | 35 | 13.0 | 22 | | |
| 003A0075 | 75 | 3 | 1210 | 32 | 1 1/4" | 6 | 50 | 25.0 | 25 | | |
| 001A0080 | 80 | 1 | 1108 | 28 | 1 1/8" | 1 | 20 | | 22 | 2.0 | 85.5 |
| 002A0080 | 80 | 2 | 1108 | 28 | 1 1/8" | 6 | 35 | 13.0 | 22 | | |
| 003A0080 | 80 | 3 | 1210 | 32 | 1 1/4" | 6 | 50 | 25.0 | 25 | | |
| 004A0080 | 80 | 4 | 1215 | 32 | 1 1/4" | 6 | 65 | 27.0 | 38 | | |
| 005A0080 | 80 | 5 | 1215 | 32 | 1 1/4" | 6 | 80 | 42.0 | 38 | | |
| 001A0085 | 85 | 1 | 1108 | 28 | 1 1/8" | 1 | 20 | | 22 | 2.0 | 90.5 |
| 002A0085 | 85 | 2 | 1108 | 28 | 1 1/8" | 6 | 35 | 13.0 | 22 | | |
| 003A0085 | 85 | 3 | 1210 | 32 | 1 1/4" | 6 | 50 | 25.0 | 25 | | |
| 004A0085 | 85 | 4 | 1215 | 32 | 1 1/4" | 6 | 65 | 27.0 | 38 | | |
| 005A0085 | 85 | 5 | 1215 | 32 | 1 1/4" | 6 | 80 | 42.0 | 38 | | |
| 001A0090 | 90 | 1 | 1108 | 28 | 1 1/8" | 1 | 20 | | 22 | 2.0 | 95.5 |
| 002A0090 | 90 | 2 | 1108 | 28 | 1 1/8" | 6 | 35 | 13.0 | 22 | | |
| 003A0090 | 90 | 3 | 1610 | 42 | 1 5/8" | 6 | 50 | 25.0 | 25 | | |
| 004A0090 | 90 | 4 | 1615 | 42 | 1 5/8" | 3 | 65 | 13.5 | 38 | 13.5 | |
| 005A0090 | 90 | 5 | 1615 | 42 | 1 5/8" | 3 | 80 | 21.0 | 38 | 21.0 | |
| For use with 'A'/'SPA' Section Belts | | | | | | | | | | | |
| 001A0095 | 95 | 1 | 1210 | 32 | 1 1/4" | 1 | 20 | | 25 | 5.0 | 100.5 |
| 002A0095 | 95 | 2 | 1610 | 42 | 1 5/8" | 6 | 35 | 10.0 | 25 | | |
| 003A0095 | 95 | 3 | 1610 | 42 | 1 5/8" | 6 | 50 | 25.0 | 25 | | |
| 004A0095 | 95 | 4 | 1615 | 42 | 1 5/8" | 3 | 65 | 13.5 | 38 | 13.5 | |
| 005A0095 | 95 | 5 | 1615 | 42 | 1 5/8" | 3 | 80 | 21.0 | 38 | 21.0 | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'A' / 'SPA' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|--------|-------------|----|------|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 001A0100 | 100 | 1 | 1610 | 42 | 1 5/8" | 1 | 20 | | 25 | 5.0 | 105.5 |
| 002A0100 | 100 | 2 | 1610 | 42 | 1 5/8" | 6 | 35 | 10.0 | 25 | | |
| 003A0100 | 100 | 3 | 1610 | 42 | 1 5/8" | 6 | 50 | 25.0 | 25 | | |
| 004A0100 | 100 | 4 | 1615 | 42 | 1 5/8" | 6 | 65 | 27.0 | 38 | | |
| 005A0100 | 100 | 5 | 1615 | 42 | 1 5/8" | 6 | 80 | 42.0 | 38 | | |
| 006A0100 | 100 | 6 | 1615 | 42 | 1 5/8" | 3 | 95 | 28.5 | 38 | 28.5 | |
| 001A0106 | 106 | 1 | 1610 | 42 | 1 5/8" | 1 | 20 | | 25 | 5.0 | 111.5 |
| 002A0106 | 106 | 2 | 1610 | 42 | 1 5/8" | 6 | 35 | 10.0 | 25 | | |
| 003A0106 | 106 | 3 | 1610 | 42 | 1 5/8" | 6 | 50 | 25.0 | 25 | | |
| 004A0106 | 106 | 4 | 1615 | 42 | 1 5/8" | 6 | 65 | 27.0 | 38 | | |
| 005A0106 | 106 | 5 | 2012 | 50 | 2" | 6 | 80 | 48.0 | 32 | | |
| 006A0106 | 106 | 6 | 2012 | 50 | 2" | 3 | 95 | 31.5 | 32 | 31.5 | |
| 001A0112 | 112 | 1 | 1610 | 42 | 1 5/8" | 1 | 20 | | 25 | 5.0 | 117.5 |
| 002A0112 | 112 | 2 | 1610 | 42 | 1 5/8" | 6 | 35 | 10.0 | 25 | | |
| 003A0112 | 112 | 3 | 2012 | 50 | 2" | 6 | 50 | 18.0 | 32 | | |
| 004A0112 | 112 | 4 | 2012 | 50 | 2" | 6 | 65 | 33.0 | 32 | | |
| 005A0112 | 112 | 5 | 2012 | 50 | 2" | 6 | 80 | 48.0 | 32 | | |
| 006A0112 | 112 | 6 | 2012 | 50 | 2" | 6 | 95 | 63.0 | 32 | | |
| 001A0118 | 118 | 1 | 1610 | 42 | 1 5/8" | 1 | 20 | | 25 | 5.0 | 123.5 |
| 002A0118 | 118 | 2 | 1610 | 42 | 1 5/8" | 6 | 35 | 10.0 | 25 | | |
| 003A0118 | 118 | 3 | 2012 | 50 | 2" | 6 | 50 | 18.0 | 32 | | |
| 004A0118 | 118 | 4 | 2012 | 50 | 2" | 6 | 65 | 33.0 | 32 | | |
| 005A0118 | 118 | 5 | 2012 | 50 | 2" | 6 | 80 | 48.0 | 32 | | |
| 006A0118 | 118 | 6 | 2012 | 50 | 2" | 6 | 95 | 63.0 | 32 | | |
| 001A0125 | 125 | 1 | 1610 | 42 | 1 5/8" | 1 | 20 | | 25 | 5.0 | 130.5 |
| 0020A125 | 125 | 2 | 1610 | 42 | 1 5/8" | 2 | 35 | | 25 | 10.0 | |
| 003A0125 | 125 | 3 | 2012 | 50 | 2" | 2 | 50 | | 32 | 18.0 | |
| 004A0125 | 125 | 4 | 2012 | 50 | 2" | 2 | 65 | | 32 | 33.0 | |
| 005A0125 | 125 | 5 | 2012 | 50 | 2" | 2 | 80 | | 32 | 48.0 | |
| 006A0125 | 125 | 6 | 2012 | 50 | 2" | 3 | 95 | 31.5 | 32 | 31.5 | |
| 001A0132 | 132 | 1 | 1610 | 42 | 1 5/8" | 1 | 20 | | 25 | 5.0 | 137.5 |
| 002A0132 | 132 | 2 | 1610 | 42 | 1 5/8" | 2 | 35 | | 25 | 10.0 | |
| 003A0132 | 132 | 3 | 2012 | 50 | 2" | 2 | 50 | | 32 | 18.0 | |
| 004A0132 | 132 | 4 | 2517 | 60 | 2 1/2" | 2 | 65 | | 45 | 20.0 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'A' / 'SPA' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|----|------|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 005A0132 | 132 | 5 | 2517 | 60 | 2½" | 2 | 80 | | 45 | 35.0 | |
| 006A0132 | 132 | 6 | 2517 | 60 | 2½" | 3 | 95 | 25.0 | 45 | 25.0 | |
| 001A0140 | 140 | 1 | 1610 | 42 | 1⅝" | 1 | 20 | | 25 | 5.0 | 145.5 |
| 002A0140 | 140 | 2 | 2012 | 50 | 2 | 6 | 32 | 3.0 | 32 | | |
| 003A0140 | 140 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0140 | 140 | 4 | 2517 | 60 | 2½" | 2 | 65 | | 45 | 20.0 | |
| 005A0140 | 140 | 5 | 2517 | 60 | 2½" | 2 | 80 | | 45 | 35.0 | |
| 006A0140 | 140 | 6 | 2517 | 60 | 2½" | 3 | 95 | 25.0 | 45 | 25.0 | |
| 001A0150 | 150 | 1 | 1610 | 42 | 1⅝" | 1 | 20 | | 25 | 5.0 | 155.5 |
| 002A0150 | 150 | 2 | 2012 | 50 | 2 | 6 | 35 | 3.0 | 32 | | |
| 003A0150 | 150 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0150 | 150 | 4 | 2517 | 60 | 2½" | 2 | 65 | | 45 | 20.0 | |
| 005A0150 | 150 | 5 | 2517 | 60 | 2½" | 2 | 80 | | 45 | 35.0 | |
| 006A0150 | 150 | 6 | 2517 | 60 | 2½" | 3 | 95 | 25.0 | 45 | 25.0 | |
| 001A0160 | 160 | 1 | 1610 | 42 | 1⅝" | 1 | 20 | | 25 | 5.0 | 165.5 |
| 002A0160 | 160 | 2 | 2012 | 50 | 2 | 6 | 35 | 3.0 | 32 | | |
| 003A0160 | 160 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0160 | 160 | 4 | 2517 | 60 | 2½" | 2 | 65 | | 45 | 20.0 | |
| 005A0160 | 160 | 5 | 2517 | 60 | 2½" | 2 | 80 | | 45 | 35.0 | |
| 006A0160 | 160 | 6 | 2517 | 60 | 2½" | 3 | 95 | 25.0 | 45 | 25.0 | |
| 001A0170 | 170 | 1 | 1610 | 42 | 1⅝" | 1 | 20 | | 25 | 5.0 | 175.5 |
| 002A0170 | 170 | 2 | 2012 | 50 | 2 | 6 | 35 | 3.0 | 32 | | |
| 003A0170 | 170 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0170 | 170 | 4 | 2517 | 60 | 2½" | 2 | 65 | | 45 | 20.0 | |
| 005A0170 | 170 | 5 | 2517 | 60 | 2½" | 2 | 80 | | 45 | 35.0 | |
| 006A0170 | 170 | 6 | 2517 | 60 | 2½" | 3 | 95 | 25.0 | 45 | 25.0 | |
| 001A0180 | 180 | 1 | 1610 | 42 | 1⅝" | 1 | 20 | | 25 | 5.0 | 185.5 |
| 002A0180 | 180 | 2 | 2012 | 50 | 2 | 2 | 35 | | 32 | 3.0 | |
| 003A0180 | 180 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0180 | 180 | 4 | 2517 | 60 | 2½" | 2 | 65 | | 45 | 20.0 | |
| 005A0180 | 180 | 5 | 3020 | 75 | 3" | 2 | 80 | | 51 | 29.0 | |
| 006A0180 | 180 | 6 | 3020 | 75 | 3" | 3 | 95 | 22.0 | 51 | 22.0 | |
| 001A0190 | 190 | 1 | 2012 | 50 | 1⅝" | 1 | 20 | | 32 | 12.0 | 195.5 |
| 002A0190 | 190 | 2 | 2012 | 50 | 2 | 2 | 35 | | 32 | 3.0 | |
| 003A0190 | 190 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0190 | 190 | 4 | 3020 | 75 | 3" | 2 | 65 | | 51 | 14.0 | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'A' / 'SPA' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|----|------|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 005A0190 | 190 | 5 | 3020 | 75 | 3" | 2 | 80 | | 51 | 29.0 | 205.5 |
| 006A0190 | 190 | 6 | 3020 | 75 | 3" | 3 | 95 | 22.0 | 51 | 22.0 | |
| 001A0200 | 200 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | |
| 002A0200 | 200 | 2 | 2517 | 60 | 2½" | 8 | 35 | | 45 | 10.0 | |
| 003A0200 | 200 | 3 | 2517 | 60 | 2½" | 3 | 50 | 2.5 | 45 | 2.5 | |
| 004A0200 | 200 | 4 | 3020 | 75 | 3" | 2 | 65 | | 51 | 14.0 | |
| 005A0200 | 200 | 5 | 3020 | 75 | 3" | 2 | 80 | | 51 | 29.0 | |
| 006A0200 | 200 | 6 | 3020 | 75 | 3" | 3 | 95 | 22.0 | 51 | 22.0 | |
| 001A0212 | 212 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 217.5 |
| 002A0212 | 212 | 2 | 2517 | 60 | 2½" | 8 | 35 | | 45 | 10.0 | |
| 003A0212 | 212 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0212 | 212 | 4 | 3020 | 75 | 3" | 2 | 65 | | 51 | 14.0 | |
| 005A0212 | 212 | 5 | 3020 | 75 | 3" | 2 | 80 | | 51 | 29.0 | |
| 006A0212 | 212 | 6 | 3020 | 75 | 3" | 3 | 95 | 22.0 | 51 | 22.0 | |
| 001A0224 | 224 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 229.5 |
| 002A0224 | 224 | 2 | 2517 | 60 | 2½" | 8 | 35 | | 45 | 10.0 | |
| 003A0224 | 224 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0224 | 224 | 4 | 3020 | 75 | 3" | 2 | 65 | | 51 | 14.0 | |
| 005A0224 | 224 | 5 | 3020 | 75 | 3" | 2 | 80 | | 51 | 29.0 | |
| 006A0224 | 224 | 6 | 3020 | 75 | 3" | 3 | 95 | 22.0 | 51 | 22.0 | |
| 001A0236 | 236 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 241.5 |
| 002A0236 | 236 | 2 | 2517 | 60 | 2½" | 8 | 35 | | 45 | 10.0 | |
| 003A0236 | 236 | 3 | 2517 | 60 | 2½" | 2 | 50 | | 45 | 5.0 | |
| 004A0236 | 236 | 4 | 3020 | 75 | 3" | 2 | 65 | | 51 | 14.0 | |
| 005A0236 | 236 | 5 | 3020 | 75 | 3" | 2 | 80 | | 51 | 29.0 | |
| 006A0236 | 236 | 6 | 3020 | 75 | 3" | 3 | 95 | 22.0 | 51 | 22.0 | |
| 001A0250 | 250 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 255.5 |
| 002A0250 | 250 | 2 | 2517 | 60 | 2½" | 8 | 35 | | 45 | 10.0 | |
| 003A0250 | 250 | 3 | 2517 | 60 | 2½" | 7 | 50 | 2.5 | 45 | 2.5 | |
| 004A0250 | 250 | 4 | 3020 | 75 | 3" | 7 | 65 | 7.0 | 51 | 7.0 | |
| 005A0250 | 250 | 5 | 3020 | 75 | 3" | 7 | 80 | 14.5 | 51 | 14.5 | |
| 006A0250 | 250 | 6 | 3020 | 75 | 3" | 7 | 95 | 22.0 | 51 | 22.0 | |
| 001A0265 | 265 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 270.5 |
| 002A0265 | 265 | 2 | 2517 | 60 | 2½" | 8 | 35 | | 45 | 10.0 | |
| 003A0265 | 265 | 3 | 2517 | 60 | 2½" | 7 | 50 | 2.5 | 45 | 2.5 | |
| 004A0265 | 265 | 4 | 3020 | 75 | 3" | 7 | 65 | 7.0 | 51 | 7.0 | |
| 005A0265 | 265 | 5 | 3020 | 75 | 3" | 7 | 80 | 14.5 | 51 | 14.5 | |
| 006A0265 | 265 | 6 | 3020 | 75 | 3" | 7 | 95 | 22.0 | 51 | 22.0 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'A' / 'SPA' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|----|-----|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 001A0280 | 280 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 285.5 |
| 002A0280 | 280 | 2 | 2517 | 60 | 2½" | 8 | 35 | | 45 | 10.0 | |
| 003A0280 | 280 | 3 | 2517 | 60 | 2½" | 7 | 50 | | 45 | 5.0 | |
| 004A0280 | 280 | 4 | 3020 | 75 | 3" | 7 | 65 | 7.0 | 51 | 7.0 | |
| 005A0280 | 280 | 5 | 3535 | 90 | 3½" | 8 | 80 | | 89 | 9.0 | |
| 006A0280 | 280 | 6 | 3535 | 90 | 3½" | 7 | 95 | | 89 | 6.0 | |
| 001A0300 | 300 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 305.5 |
| 002A0300 | 300 | 2 | 2517 | 60 | 2½" | 8 | 35 | | 45 | 10.0 | |
| 003A0300 | 300 | 3 | 2517 | 60 | 2½" | 7 | 50 | | 45 | 5.0 | |
| 004A0300 | 300 | 4 | 3020 | 75 | 3" | 7 | 65 | 7.0 | 51 | 7.0 | |
| 005A0300 | 300 | 5 | 3535 | 90 | 3½" | 8 | 80 | | 89 | 9.0 | |
| 006A0300 | 300 | 6 | 3535 | 90 | 3½" | 7 | 95 | | 89 | 6.0 | |
| 001A0315 | 315 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 320.5 |
| 002A0315 | 315 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0315 | 315 | 3 | 3020 | 75 | 3" | 8 | 50 | 0.5 | 51 | 0.5 | |
| 004A0315 | 315 | 4 | 3020 | 75 | 3" | 7 | 65 | 7.0 | 51 | 7.0 | |
| 005A0315 | 315 | 5 | 3535 | 90 | 3½" | 8 | 80 | 4.5 | 89 | 4.5 | |
| 006A0315 | 315 | 6 | 3535 | 90 | 3½" | 7 | 95 | | 89 | 6.0 | |
| 001A0335 | 335 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 340.5 |
| 002A0335 | 335 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0335 | 335 | 3 | 3020 | 75 | 3" | 8 | 50 | | 51 | 1.0 | |
| 004A0335 | 335 | 4 | 3020 | 75 | 3" | 7 | 65 | 7.0 | 51 | 7.0 | |
| 005A0335 | 335 | 5 | 3535 | 90 | 3½" | 8 | 80 | | 89 | 9.0 | |
| 006A0335 | 335 | 6 | 3535 | 90 | 3½" | 7 | 95 | | 89 | 6.0 | |
| 001A0355 | 355 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 360.5 |
| 002A0355 | 355 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0355 | 355 | 3 | 3020 | 75 | 3" | 4 | 50 | | 51 | 1.0 | |
| 004A0355 | 355 | 4 | 3020 | 75 | 3" | 5 | 65 | 7.0 | 51 | 7.0 | |
| 005A0355 | 355 | 5 | 3535 | 90 | 3½" | 4 | 80 | | 89 | 9.0 | |
| 006A0355 | 355 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0375 | 375 | 1 | 2012 | 50 | 2" | 1 | 20 | | 32 | 12.0 | 380.5 |
| 002A0375 | 375 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0375 | 375 | 3 | 3020 | 75 | 3" | 4 | 50 | | 51 | 1.0 | |
| 004A0375 | 375 | 4 | 3020 | 75 | 3" | 5 | 65 | 7.0 | 51 | 7.0 | |
| 005A0375 | 375 | 5 | 3535 | 90 | 3½" | 4 | 80 | | 89 | 9.0 | |
| 006A0375 | 375 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0400 | 400 | 1 | 2012 | 50 | 2" | 4 | 20 | | 32 | 12.0 | 405.5 |
| 002A0400 | 400 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'A' / 'SPA' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|----|-----|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 003A0400 | 400 | 3 | 3020 | 75 | 3" | 4 | 50 | 0.5 | 51 | 0.5 | |
| 004A0400 | 400 | 4 | 3020 | 75 | 3" | 5 | 65 | 7.0 | 51 | 7.0 | |
| 005A0400 | 400 | 5 | 3535 | 90 | 3½" | 4 | 80 | 4.5 | 89 | 4.5 | |
| 006A0400 | 400 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0425 | 425 | 1 | 2012 | 50 | 2" | 4 | 20 | | 32 | 12.0 | 430.5 |
| 002A0425 | 425 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0425 | 425 | 3 | 3020 | 75 | 3" | 4 | 50 | | 51 | 1.0 | |
| 004A0425 | 425 | 4 | 3020 | 75 | 3" | 5 | 65 | 7.0 | 51 | 7.0 | |
| 005A0425 | 425 | 5 | 3535 | 90 | 3½" | 4 | 80 | | 89 | 9.0 | |
| 006A0425 | 425 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0450 | 450 | 1 | 2012 | 50 | 2" | 4 | 20 | | 32 | 12.0 | 455.5 |
| 002A0450 | 450 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0450 | 450 | 3 | 3020 | 75 | 3" | 4 | 50 | | 51 | 1.0 | |
| 004A0450 | 450 | 4 | 3020 | 75 | 3" | 5 | 65 | 7.0 | 51 | 7.0 | |
| 005A0450 | 450 | 5 | 3535 | 90 | 3½" | 4 | 80 | | 89 | 9.0 | |
| 006A0450 | 450 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0475 | 475 | 1 | 2012 | 50 | 2" | 4 | 20 | | 32 | 12.0 | 480.5 |
| 002A0475 | 475 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0475 | 475 | 3 | 3020 | 75 | 3" | 4 | 50 | | 51 | 1.0 | |
| 004A0475 | 475 | 4 | 3020 | 75 | 3" | 5 | 65 | 7.0 | 51 | 7.0 | |
| 005A0475 | 475 | 5 | 3535 | 90 | 3½" | 4 | 80 | | 89 | 9.0 | |
| 006A0475 | 475 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0500 | 500 | 1 | 2517 | 60 | 2½" | 4 | 20 | | 45 | 25.0 | 505.5 |
| 002A0500 | 500 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0500 | 500 | 3 | 3020 | 75 | 3" | 4 | 50 | 0.5 | 51 | 0.5 | |
| 004A0500 | 500 | 4 | 3020 | 75 | 3" | 5 | 65 | 7.0 | 51 | 7.0 | |
| 005A0500 | 500 | 5 | 3535 | 90 | 3½" | 4 | 80 | 4.5 | 89 | 4.5 | |
| 006A0500 | 500 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0530 | 530 | 1 | 2517 | 60 | 2½" | 4 | 20 | | 45 | 25.0 | 535.5 |
| 002A0530 | 530 | 2 | 2517 | 60 | 2½" | 4 | 35 | | 45 | 10.0 | |
| 003A0530 | 530 | 3 | 3020 | 75 | 3" | 4 | 50 | | 51 | 1.0 | |
| 004A0530 | 530 | 4 | 3020 | 75 | 3" | 5 | 65 | 7.0 | 51 | 7.0 | |
| 005A0530 | 530 | 5 | 3535 | 90 | 3½" | 4 | 80 | 4.5 | 89 | 4.5 | |
| 006A0530 | 530 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0560 | 560 | 1 | 3020 | 75 | 3" | 4 | 20 | | 51 | 31.0 | 565.5 |
| 002A0560 | 560 | 2 | 3020 | 75 | 3" | 4 | 35 | | 51 | 16.0 | |
| 003A0560 | 560 | 3 | 3020 | 75 | 3" | 4 | 50 | | 51 | 1.0 | |
| 004A0560 | 560 | 4 | 3535 | 90 | 3½" | 4 | 65 | 7.0 | 89 | 7.0 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'A' / 'SPA' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|----|------|-----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 005A0560 | 560 | 5 | 3535 | 90 | 3½" | 4 | 80 | | 89 | 9.0 | |
| 006A0560 | 560 | 6 | 3535 | 90 | 3½" | 5 | 95 | | 89 | 6.0 | |
| 001A0630 | 630 | 1 | 3020 | 75 | 3" | 4 | 20 | | 51 | 31.0 | 635.5 |
| 002A0630 | 630 | 2 | 3020 | 75 | 3" | 4 | 35 | | 51 | 16.0 | |
| 003A0630 | 630 | 3 | 3020 | 75 | 3" | 4 | 50 | 0.5 | 51 | 0.5 | |
| 004A0630 | 630 | 4 | 3535 | 90 | 3½" | 4 | 65 | 12.0 | 89 | 12.0 | |
| 005A0630 | 630 | 5 | 3535 | 90 | 3½" | 4 | 80 | 4.5 | 89 | 4.5 | |
| 006A0630 | 630 | 6 | 4040 | 100 | 4" | 4 | 95 | | 102 | 7.0 | |
| 003A0710 | 710 | 3 | 3020 | 75 | 3" | 4 | 50 | | 51 | 1.0 | 715.5 |
| 004A0710 | 710 | 4 | 3535 | 90 | 3½" | 4 | 65 | 12.0 | 89 | 12.0 | |
| 005A0710 | 710 | 5 | 3535 | 90 | 3½" | 4 | 80 | | 89 | 9.0 | |
| 006A0710 | 710 | 6 | 4040 | 100 | 4" | 4 | 95 | | 102 | 7.0 | |
| 003A0800 | 800 | 3 | 3535 | 90 | 3½" | 4 | 50 | 19.5 | 89 | 19.5 | 805.5 |
| 004A0800 | 800 | 4 | 3535 | 90 | 3½" | 4 | 65 | 12.0 | 89 | 12.0 | |
| 005A0800 | 800 | 5 | 4040 | 100 | 4" | 4 | 80 | 11.0 | 102 | 11.0 | |
| 006A0800 | 800 | 6 | 4040 | 100 | 4" | 4 | 95 | 3.5 | 102 | 3.5 | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'B' / 'SPB' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|---------------------------------------|--------------|----------------|----------|-----------|--------|-------------|-----|------|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| For use with 'B' Section Belts | | | | | | | | | | | |
| 001B0100 | 100 | 1 | 1610 | 42 | 1 5/8" | 1 | 25 | | 25 | | 107 |
| 002B0100 | | 2 | 1610 | 42 | 1 5/8" | 6 | 44 | 19.0 | 25 | | |
| 003B0100 | | 3 | 1610 | 42 | 1 5/8" | 6 | 63 | 38.0 | 25 | | |
| 001B0106 | 106 | 1 | 1610 | 42 | 1 5/8" | 1 | 25 | | 25 | | 113 |
| 002B0106 | | 2 | 1610 | 42 | 1 5/8" | 6 | 44 | 19.0 | 25 | | |
| 003B0106 | | 3 | 1610 | 42 | 1 5/8" | 6 | 63 | 38.0 | 25 | | |
| 001B0112 | 112 | 1 | 1610 | 42 | 1 5/8" | 1 | 25 | | 25 | | 119 |
| 002B0112 | | 2 | 1610 | 42 | 1 5/8" | 2 | 44 | 19.0 | 25 | | |
| 003B0112 | | 3 | 1610 | 42 | 1 5/8" | 2 | 63 | 38.0 | 25 | | |
| 001B0118 | 118 | 1 | 1610 | 42 | 1 5/8" | 1 | 25 | | 25 | | 125 |
| 002B0118 | | 2 | 1610 | 42 | 1 5/8" | 2 | 44 | | 25 | 19.0 | |
| 003B0118 | | 3 | 1610 | 42 | 1 5/8" | 2 | 63 | | 25 | 38.0 | |
| 001B0125 | 125 | 1 | 1610 | 42 | 1 5/8" | 1 | 25 | | 25 | | 132 |
| 002B0125 | | 2 | 1610 | 42 | 1 5/8" | 6 | 44 | 19.0 | 25 | | |
| 003B0125 | | 3 | 1610 | 42 | 1 5/8" | 6 | 63 | 38.0 | 25 | | |
| 004B0125 | | 4 | 2012 | 50 | 2" | 3 | 82 | 25.0 | 32 | 25.0 | |
| 005B0125 | | 5 | 2012 | 50 | 2" | 3 | 101 | 34.5 | 32 | 34.5 | |
| 006B0125 | | 6 | 2012 | 50 | 2" | 3 | 120 | 44.0 | 32 | 44.0 | |
| 001B0132 | 132 | 1 | 1610 | 42 | 1 5/8" | 1 | 25 | | 25 | | 139 |
| 002B0132 | | 2 | 1610 | 42 | 1 5/8" | 6 | 44 | 19.0 | 25 | | |
| 003B0132 | | 3 | 1610 | 42 | 1 5/8" | 6 | 63 | 38.0 | 25 | | |
| 004B0132 | | 4 | 2012 | 50 | 2" | 3 | 82 | 25.0 | 32 | 25.0 | |
| 005B0132 | | 5 | 2012 | 50 | 2" | 2 | 101 | | 32 | 69.0 | |
| 006B0132 | | 6 | 2012 | 50 | 2" | 3 | 120 | 44.0 | 32 | 44.0 | |
| 001B0140 | 140 | 1 | 1610 | 42 | 1 5/8" | 1 | 25 | 25.0 | | | 147 |
| 002B0140 | | 2 | 1610 | 42 | 1 5/8" | 6 | 44 | 19.0 | 25 | | |
| 003B0140 | | 3 | 1610 | 42 | 1 5/8" | 6 | 63 | 38.0 | 25 | | |
| 004B0140 | | 4 | 2012 | 50 | 2" | 3 | 82 | 25.0 | 32 | 25.0 | |
| 005B0140 | | 5 | 2012 | 50 | 2" | 2 | 101 | | 32 | 69.0 | |
| 006B0140 | | 6 | 2517 | 60 | 2 1/2" | 3 | 120 | 37.5 | 45 | 37.5 | |
| 001B0150 | 150 | 1 | 1610 | 42 | 1 5/8" | 1 | 25 | | 25 | | 157 |
| 002B0150 | | 2 | 1610 | 42 | 1 5/8" | 6 | 44 | 19.0 | 25 | | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'B' / 'SPB' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|---|--------------|----------------|----------|-----------|------|-------------|-----|------|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 003B0150 | | 3 | 2012 | 50 | 2" | 6 | 63 | 31.0 | 32 | | |
| 004B0150 | | 4 | 2012 | 50 | 2" | 3 | 82 | 25.0 | 32 | 25.0 | |
| 005B0150 | | 5 | 2517 | 60 | 2½" | 2 | 101 | | 45 | 56.0 | |
| 006B0150 | | 6 | 2517 | 60 | 2½" | 2 | 120 | | 45 | 75.0 | |
| 008B0150 | | 8 | 2517 | 60 | 2½" | 3 | 158 | 56.5 | 45 | 56.5 | |
| For use with 'B' / 'SPB' Section Belts | | | | | | | | | | | |
| 001B0160 | 160 | 1 | 1610 | 42 | 1⅝" | 1 | 25 | | 25 | | 167 |
| 002B0160 | | 2 | 2012 | 50 | 2" | 6 | 44 | 12.0 | 32 | | |
| 003B0160 | | 3 | 2517 | 60 | 2½" | 6 | 63 | 18.0 | 45 | | |
| 004B0160 | | 4 | 2517 | 60 | 2½" | 3 | 82 | 18.5 | 45 | 18.5 | |
| 005B0160 | | 5 | 2517 | 60 | 2½" | 3 | 101 | 28.0 | 45 | 28.0 | |
| 006B0160 | | 6 | 2517 | 60 | 2½" | 2 | 120 | | 45 | 75.0 | |
| 008B0160 | | 8 | 3020 | 75 | 3" | 3 | 158 | 53.5 | 51 | 53.5 | |
| 001B0170 | 170 | 1 | 1610 | 42 | 1⅝" | 1 | 25 | | 25 | | 177 |
| 002B0170 | | 2 | 2012 | 50 | 2" | 6 | 44 | 12.0 | 32 | | |
| 003B0170 | | 3 | 2517 | 60 | 2½" | 6 | 63 | 18.0 | 45 | | |
| 004B0170 | | 4 | 2517 | 60 | 2½" | 3 | 82 | 18.5 | 45 | 18.5 | |
| 005B0170 | | 5 | 3020 | 75 | 3" | 3 | 101 | 25.0 | 51 | 25.0 | |
| 006B0170 | | 6 | 3020 | 75 | 3" | 2 | 120 | | 51 | 69.0 | |
| 008B0170 | | 8 | 3030 | 75 | 3" | 3 | 158 | 41.0 | 76 | 41.0 | |
| 001B0180 | 180 | 1 | 1610 | 42 | 1⅝" | 1 | 25 | | 25 | | 187 |
| 002B0180 | | 2 | 2012 | 50 | 2" | 6 | 44 | 12.0 | 32 | | |
| 003B0180 | | 3 | 2517 | 60 | 2½" | 6 | 63 | 18.0 | 45 | | |
| 004B0180 | | 4 | 2517 | 60 | 2½" | 3 | 82 | 18.5 | 45 | 18.5 | |
| 005B0180 | | 5 | 3020 | 75 | 3" | 3 | 101 | 25.0 | 51 | 25.0 | |
| 006B0180 | | 6 | 3020 | 75 | 3" | 2 | 120 | | 51 | 75.0 | |
| 008B0180 | | 8 | 3030 | 75 | 3" | 3 | 158 | 41.0 | 76 | 41.0 | |
| 001B0190 | 190 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7.0 | 197 |
| 002B0190 | | 2 | 2517 | 60 | 2½" | 1 | 44 | | 45 | 1.0 | |
| 003B0190 | | 3 | 2517 | 60 | 2½" | 6 | 63 | 18.0 | 45 | | |
| 004B0190 | | 4 | 2517 | 60 | 2½" | 3 | 82 | 18.5 | 45 | 18.5 | |
| 005B0190 | | 5 | 3020 | 75 | 3" | 3 | 101 | 25.0 | 51 | 25.0 | |
| 006B0190 | | 6 | 3020 | 75 | 3" | 2 | 120 | | 51 | 69.0 | |
| 008B0190 | | 8 | 3030 | 75 | 3" | 3 | 158 | 41.0 | 76 | 41.0 | |
| 001B0200 | 200 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7.0 | 207 |
| 002B0200 | | 2 | 2517 | 60 | 2½" | 1 | 44 | | 45 | 1.0 | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'B' / 'SPB' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|-----|------|----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 003B0200 | | 3 | 2517 | 60 | 2½" | 2 | 63 | | 45 | 18.0 | |
| 004B0200 | | 4 | 3020 | 75 | 3" | 2 | 82 | | 51 | 31.0 | |
| 005B0200 | | 5 | 3020 | 75 | 3" | 2 | 101 | | 51 | 50.0 | |
| 006B0200 | | 6 | 3020 | 75 | 3" | 2 | 120 | | 51 | 69.0 | |
| 008B0200 | | 8 | 3535 | 90 | 3½" | 3 | 158 | 34.5 | 89 | 34.5 | |
| 001B0212 | 212 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7.0 | 219 |
| 002B0212 | | 2 | 2517 | 60 | 2½" | 1 | 44 | | 45 | 1.0 | |
| 003B0212 | | 3 | 2517 | 60 | 2½" | 2 | 63 | | 45 | 18.0 | |
| 004B0212 | | 4 | 3020 | 75 | 3" | 2 | 82 | | 51 | 31.0 | |
| 005B0212 | | 5 | 3020 | 75 | 3" | 2 | 101 | | 51 | 50.0 | |
| 006B0212 | | 6 | 3020 | 75 | 3" | 2 | 120 | | 51 | 69.0 | |
| 008B0212 | | 8 | 3535 | 90 | 3½" | 3 | 158 | 34.5 | 89 | 34.5 | |
| 001B0224 | 224 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7.0 | 231 |
| 002B0224 | | 2 | 2517 | 60 | 2½" | 1 | 44 | | 45 | 1.0 | |
| 003B0224 | | 3 | 2517 | 60 | 2½" | 2 | 63 | | 45 | 18.0 | |
| 004B0224 | | 4 | 3020 | 75 | 3" | 2 | 82 | | 51 | 31.0 | |
| 005B0224 | | 5 | 3020 | 75 | 3" | 2 | 101 | | 51 | 50.0 | |
| 006B0224 | | 6 | 3020 | 75 | 3" | 2 | 120 | | 51 | 69.0 | |
| 008B0224 | | 8 | 3535 | 90 | 3½" | 3 | 158 | 34.5 | 89 | 34.5 | |
| 010B0224 | | 10 | 3535 | 90 | 3½" | 3 | 196 | 53.5 | 89 | 53.5 | |
| 001B0236 | 236 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7.0 | 243 |
| 002B0236 | | 2 | 2517 | 60 | 2½" | 1 | 44 | | 45 | 1.0 | |
| 003B0236 | | 3 | 2517 | 60 | 2½" | 2 | 63 | | 45 | 18.0 | |
| 004B0236 | | 4 | 3020 | 75 | 3" | 2 | 82 | | 51 | 31.0 | |
| 005B0236 | | 5 | 3020 | 75 | 3" | 2 | 101 | | 51 | 50 | |
| 006B0236 | | 6 | 3020 | 75 | 3" | 2 | 120 | | 51 | 69 | |
| 008B0236 | | 8 | 3535 | 90 | 3½" | 3 | 158 | 34.5 | 89 | 34.5 | |
| 010B0236 | | 10 | 3535 | 90 | 3½" | 3 | 196 | 53.5 | 89 | 53.5 | |
| 001B0250 | 250 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7 | 257 |
| 002B0250 | | 2 | 2517 | 60 | 2½" | 8 | 44 | | 45 | 1 | |
| 003B0250 | | 3 | 3020 | 75 | 3" | 2 | 63 | | 51 | 12 | |
| 004B0250 | | 4 | 3020 | 75 | 3" | 2 | 82 | | 51 | 31 | |
| 005B0250 | | 5 | 3020 | 75 | 3" | 2 | 101 | | 51 | 50 | |
| 006B0250 | | 6 | 3020 | 75 | 3" | 2 | 120 | | 51 | 69 | |
| 008B0250 | | 8 | 3535 | 90 | 3½" | 3 | 158 | 34.5 | 89 | 34.5 | |
| 008B0250 | | 10 | 3535 | 90 | 3½" | 3 | 196 | 53.5 | 89 | 53.5 | |
| 001B0265 | 265 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7 | 272 |
| 002B0265 | | 2 | 2517 | 60 | 2½" | 8 | 44 | | 45 | 1 | |
| 003B0265 | | 3 | 3020 | 75 | 3" | 7 | 63 | 6 | 51 | 6 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'B' / 'SPB' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|-----|------|-----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 004B0265 | | 4 | 3020 | 75 | 3" | 7 | 82 | 15.5 | 51 | 15.5 | |
| 005B0265 | | 5 | 3535 | 90 | 3½" | 7 | 101 | 6 | 89 | 6 | |
| 006B0265 | | 6 | 3535 | 90 | 3½" | 7 | 120 | 15.5 | 89 | 15.5 | |
| 008B0265 | | 8 | 3535 | 90 | 3½" | 3 | 158 | 34.5 | 89 | 34.5 | |
| 010B0265 | | 10 | 3535 | 90 | 3½" | 3 | 196 | 53.5 | 89 | 53.5 | |
| 001B0280 | 280 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7 | 287 |
| 002B0280 | | 2 | 2517 | 60 | 2½" | 8 | 44 | | 45 | 1 | |
| 003B0280 | | 3 | 3020 | 75 | 3" | 7 | 63 | 6 | 51 | 6 | |
| 004B0280 | | 4 | 3020 | 75 | 3" | 7 | 82 | 15.5 | 51 | 15.5 | |
| 005B0280 | | 5 | 3535 | 90 | 3½" | 7 | 101 | 6 | 89 | 6 | |
| 006B0280 | | 6 | 3535 | 90 | 3½" | 7 | 120 | 15.5 | 89 | 15.5 | |
| 008B0280 | | 8 | 3535 | 90 | 3½" | 7 | 158 | 34.5 | 89 | 34.5 | |
| 010B0280 | | 10 | 3535 | 90 | 3½" | 7 | 196 | 53.5 | 89 | 53.5 | |
| 001B0300 | 300 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7.0 | 307 |
| 002B0300 | | 2 | 2517 | 60 | 2½" | 8 | 44 | | 45 | 1.0 | |
| 003B0300 | | 3 | 3020 | 75 | 3" | 7 | 63 | 6.0 | 51 | 6.0 | |
| 004B0300 | | 4 | 3535 | 90 | 3½" | 8 | 82 | | 89 | 7.0 | |
| 005B0300 | | 5 | 3535 | 90 | 3½" | 7 | 101 | 6.0 | 89 | 6.0 | |
| 006B0300 | | 6 | 3535 | 90 | 3½" | 7 | 120 | 15.5 | 89 | 15.5 | |
| 008B0300 | | 8 | 3535 | 90 | 3½" | 7 | 158 | 34.5 | 89 | 35.0 | |
| 010B0300 | | 10 | 3535 | 90 | 3½" | 7 | 196 | 53.5 | 89 | 53.5 | |
| 001B0315 | 315 | 1 | 2012 | 50 | 2" | 1 | 25 | | 32 | 7.0 | 322 |
| 003B0315 | | 2 | 2517 | 60 | 2½" | 8 | 44 | | 45 | 1.0 | |
| 003B0315 | | 3 | 3020 | 75 | 3" | 7 | 63 | 6.0 | 51 | 6.0 | |
| 004B0315 | | 4 | 3535 | 90 | 3½" | 8 | 82 | 3.5 | 89 | 3.5 | |
| 005B0315 | | 5 | 3535 | 90 | 3½" | 7 | 101 | 6.0 | 89 | 6.0 | |
| 006B0315 | | 6 | 3535 | 90 | 3½" | 7 | 120 | 15.5 | 89 | 15.5 | |
| 008B0315 | | 8 | 3535 | 90 | 3½" | 7 | 158 | 34.5 | 89 | 34.5 | |
| 010B0315 | | 10 | 3535 | 90 | 3½" | 7 | 196 | 53.5 | 89 | 53.5 | |
| 002B0335 | 335 | 2 | 2517 | 60 | 2½" | 8 | 44 | | 45 | 1.0 | 342 |
| 003B0335 | | 3 | 3020 | 75 | 3" | 7 | 63 | 6.0 | 51 | 6.0 | |
| 004B0335 | | 4 | 3535 | 90 | 3½" | 8 | 82 | 3.5 | 89 | 3.5 | |
| 005B0335 | | 5 | 3535 | 90 | 3½" | 7 | 101 | 6.0 | 89 | 6.0 | |
| 006B0335 | | 6 | 3535 | 90 | 3½" | 7 | 120 | 15.5 | 89 | 15.5 | |
| 008B0335 | | 8 | 3535 | 90 | 3½" | 7 | 158 | 34.5 | 89 | 34.5 | |
| 010B0335 | | 10 | 4040 | 100 | 4" | 7 | 196 | 47.0 | 102 | 47.0 | |
| 002B0355 | 355 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 362 |
| 003B0355 | | 3 | 3020 | 75 | 3" | 5 | 63 | 6.0 | 51 | 6.0 | |
| 004B0355 | | 4 | 3535 | 90 | 3½" | 8 | 82 | 3.5 | 89 | 3.5 | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'B' / 'SPB' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|-----|------|-----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 005B0355 | | 5 | 3535 | 90 | 3½ | 7 | 101 | 6.0 | 89 | 6.0 | |
| 006B0355 | | 6 | 3535 | 90 | 3½ | 7 | 120 | 15.5 | 89 | 15.5 | |
| 008B0355 | | 8 | 3535 | 90 | 3½ | 7 | 158 | 34.5 | 89 | 34.5 | |
| 010B0355 | | 10 | 4040 | 100 | 4" | 7 | 196 | 47.0 | 102 | 47.0 | |
| 002B0375 | 375 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 382 |
| 003B0375 | | 3 | 3535 | 90 | 3½ | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0375 | | 4 | 3535 | 90 | 3½ | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0375 | | 5 | 3535 | 90 | 3½ | 5 | 101 | 6.0 | 89 | 6.0 | |
| 006B0375 | | 6 | 3535 | 90 | 3½ | 5 | 120 | 15.5 | 89 | 15.5 | |
| 008B0375 | | 8 | 4040 | 100 | 4" | 5 | 158 | 28.0 | 102 | 28.0 | |
| 010B0375 | | 10 | 4040 | 100 | 4" | 5 | 196 | 47.0 | 102 | 47.0 | |
| 002B0400 | 400 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 407 |
| 003B0400 | | 3 | 3535 | 90 | 3½ | 4 | 63 | 13 | 89 | 13 | |
| 004B0400 | | 4 | 3535 | 90 | 3½ | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0400 | | 5 | 3535 | 90 | 3½ | 5 | 101 | 6.0 | 89 | 6.0 | |
| 006B0400 | | 6 | 3535 | 90 | 3½ | 5 | 120 | 15.5 | 89 | 15.5 | |
| 008B0400 | | 8 | 4040 | 100 | 4" | 5 | 158 | 28.0 | 102 | 28.0 | |
| 010B0400 | | 10 | 4040 | 100 | 4" | 5 | 196 | 47.0 | 102 | 47.0 | |
| 002B0425 | 425 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 432 |
| 003B0425 | | 3 | 3535 | 90 | 3½ | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0425 | | 4 | 3535 | 90 | 3½ | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0425 | | 5 | 3535 | 90 | 3½ | 5 | 101 | 6.0 | 89 | 6.0 | |
| 006B0425 | | 6 | 3535 | 90 | 3½ | 5 | 120 | 15.5 | 89 | 15.5 | |
| 008B0425 | | 8 | 4040 | 100 | 4" | 5 | 158 | 28.0 | 102 | 28.0 | |
| 010B0425 | | 10 | 4040 | 100 | 4" | 5 | 196 | 47.0 | 102 | 47.0 | |
| 002B0450 | 450 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 457 |
| 003B0450 | | 3 | 3535 | 90 | 3½ | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0450 | | 4 | 3535 | 90 | 3½ | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0450 | | 5 | 3535 | 90 | 3½ | 5 | 101 | 6.0 | 89 | 6.0 | |
| 006B0450 | | 6 | 4040 | 100 | 4" | 5 | 120 | 9.0 | 102 | 9.0 | |
| 008B0450 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | |
| 010B0450 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | |
| 002B0475 | 475 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 482 |
| 003B0475 | | 3 | 3535 | 90 | 3½ | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0475 | | 4 | 3535 | 90 | 3½ | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0475 | | 5 | 3535 | 90 | 3½ | 5 | 101 | 6.0 | 89 | 6.0 | |
| 006B0475 | | 6 | 4040 | 100 | 4" | 5 | 120 | 9.0 | 102 | 9.0 | |
| 008B0475 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | |
| 010B0475 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'B' / 'SPB' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|-----|------|-----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 002B0500 | 500 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 507 |
| 003B0500 | | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0500 | | 4 | 3535 | 90 | 3½" | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0500 | | 5 | 4040 | 100 | 4" | 5 | 101 | 6.0 | 89 | 6.0 | |
| 006B0500 | | 6 | 4040 | 100 | 4" | 5 | 120 | 9.0 | 102 | 9.0 | |
| 008B0500 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | |
| 010B0500 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | |
| 002B0530 | 530 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 537 |
| 003B0530 | | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0530 | | 4 | 3535 | 90 | 3½" | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0530 | | 5 | 4040 | 100 | 4" | 4 | 101 | 0.5 | 102 | 0.5 | |
| 006B0530 | | 6 | 4040 | 100 | 4" | 5 | 120 | 9.0 | 102 | 9.0 | |
| 008B0530 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | |
| 010B0530 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | |
| 002B0560 | 560 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 567 |
| 003B0560 | | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0560 | | 4 | 3535 | 90 | 3½" | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0560 | | 5 | 4040 | 100 | 4" | 4 | 101 | 0.5 | 102 | 0.5 | |
| 006B0560 | | 6 | 4040 | 100 | 4" | 5 | 120 | 9.0 | 102 | 9.0 | |
| 008B0560 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | |
| 010B0560 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | |
| 002B0600 | 600 | 2 | 3020 | 75 | 3" | 4 | 44 | 3.5 | 51 | 3.5 | 607 |
| 003B0600 | | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0600 | | 4 | 3535 | 90 | 3½" | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0600 | | 5 | 4040 | 100 | 4" | 4 | 101 | 0.5 | 102 | 0.5 | |
| 006B0600 | | 6 | 4040 | 100 | 4" | 5 | 120 | 9.0 | 102 | 9.0 | |
| 008B0600 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | |
| 010B0600 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | |
| 002B0630 | 630 | 2 | 3030 | 75 | 3" | 4 | 44 | 16.0 | 76 | 16.0 | 637 |
| 003B0630 | | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0630 | | 4 | 3535 | 90 | 3½" | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0630 | | 5 | 4040 | 100 | 4" | 4 | 101 | 0.5 | 102 | 0.5 | |
| 006B0630 | | 6 | 4040 | 100 | 4" | 5 | 120 | 9.0 | 102 | 9.0 | |
| 008B0630 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | |
| 010B0630 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | |
| 002B0710 | 710 | 2 | 3030 | 75 | 3" | 4 | 44 | 16.0 | 76 | 16.0 | 717 |
| 003B0710 | | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | |
| 004B0710 | | 4 | 3535 | 90 | 3½" | 4 | 82 | 3.5 | 89 | 3.5 | |
| 005B0710 | | 5 | 4040 | 100 | 4" | 4 | 101 | 0.5 | 102 | 0.5 | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'B' / 'SPB' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) | |
|--------------|--------------|----------------|----------|-----------|------|-------------|-----|------|-----|------|-----------------|-----|
| | | | | Met. | Imp. | | | | | | | |
| 006B0710 | 710 | 6 | 4545 | 110 | 4½" | 5 | 120 | 3.0 | 114 | 3.0 | | |
| 008B0710 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | | |
| 010B0710 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | | |
| 002B0762 | 762 | 2 | 3030 | 75 | 3" | 4 | 44 | 16.0 | 76 | 16.0 | 769 | |
| 003B0762 | | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | | |
| 004B0762 | | 4 | 4040 | 100 | 4" | 4 | 82 | 10.0 | 102 | 10.0 | | |
| 005B0762 | | 5 | 4040 | 100 | 4" | 4 | 101 | 0.5 | 102 | 0.5 | | |
| 006B0762 | | 6 | 4545 | 110 | 4½" | 5 | 120 | 3.0 | 114 | 3.0 | | |
| 008B0762 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | | |
| 010B0762 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | | |
| 002B0800 | 800 | 2 | 3030 | 75 | 3" | 4 | 44 | 16.0 | 76 | 16.0 | | 807 |
| 003B0800 | | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | | |
| 004B0800 | | 4 | 4040 | 100 | 4" | 4 | 82 | 10.0 | 102 | 10.0 | | |
| 005B0800 | | 5 | 4040 | 100 | 4" | 4 | 101 | 0.5 | 102 | 0.5 | | |
| 006B0800 | | 6 | 4545 | 110 | 4½" | 5 | 120 | 3.0 | 114 | 3.0 | | |
| 008B0800 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | | |
| 010B0800 | | 10 | 4545 | 110 | 4½" | 5 | 196 | 41.0 | 114 | 41.0 | | |
| 003B0900 | 900 | 3 | 3535 | 90 | 3½" | 4 | 63 | 13.0 | 89 | 13.0 | 907 | |
| 004B0900 | | 4 | 4040 | 100 | 4" | 4 | 82 | 10.0 | 102 | 10.0 | | |
| 005B0900 | | 5 | 4545 | 110 | 4½" | 4 | 101 | 6.5 | 114 | 6.5 | | |
| 006B0900 | | 6 | 4545 | 110 | 4½" | 5 | 120 | 3.0 | 114 | 3.0 | | |
| 008B0900 | | 8 | 4545 | 110 | 4½" | 5 | 158 | 22.0 | 114 | 22.0 | | |
| 010B0900 | | 10 | 5050 | 125 | 5" | 5 | 196 | 34.5 | 127 | 34.5 | | |
| 003B1000 | 1000 | 3 | 4040 | 100 | 4" | 4 | 63 | 19.5 | 102 | 19.5 | 1007 | |
| 004B1000 | | 4 | 4040 | 100 | 4" | 4 | 82 | 10.0 | 102 | 10.0 | | |
| 005B1000 | | 5 | 4545 | 110 | 4½" | 4 | 101 | 6.5 | 114 | 6.5 | | |
| 006B1000 | | 6 | 4545 | 110 | 4½" | 5 | 120 | 3.0 | 114 | 3.0 | | |
| 008B1000 | | 8 | 5050 | 125 | 5" | 5 | 158 | 15.5 | 127 | 15.5 | | |
| 010B1000 | | 10 | 5050 | 125 | 5" | 5 | 196 | 34.5 | 127 | 34.5 | | |
| 003B1250 | 1250 | 3 | 4040 | 100 | 4" | 4 | 63 | 19.5 | 102 | 19.5 | 1257 | |
| 004B1250 | | 4 | 4040 | 100 | 4" | 4 | 82 | 10.0 | 102 | 10.0 | | |
| 005B1250 | | 5 | 4545 | 110 | 4½" | 4 | 101 | 6.5 | 114 | 6.5 | | |
| 006B1250 | | 6 | 5050 | 125 | 5" | 4 | 120 | 3.5 | 127 | 3.5 | | |
| 008B1250 | | 8 | 5050 | 125 | 5" | 5 | 158 | 15.5 | 127 | 15.5 | | |
| 010B1250 | | 10 | 5050 | 125 | 5" | 5 | 196 | 34.5 | 127 | 34.5 | | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'C' / 'SPC' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) | | |
|---|--------------|----------------|----------|-----------|------|-------------|-----|------|------|------|-----------------|-------|-------|
| | | | | Met. | Imp. | | | | | | | | |
| For use with 'C' Section Belts | | | | | | | | | | | | | |
| 003C0200 | 200 | 3 | 2517 | 60 | 2½" | 3 | 85 | 20.0 | 45 | 20.0 | 209.6 | | |
| 004C0200 | | 4 | 3020 | 75 | 3" | 3 | 111 | 30.0 | 51 | 30.0 | | | |
| 005C0200 | | 5 | 3535 | 90 | 3½" | 3 | 136 | 16.0 | 89 | 31.0 | | | |
| 006C0200 | | 6 | 3535 | 90 | 3½" | 3 | 162 | 16.0 | 89 | 57.0 | | | |
| 007C0200 | | 7 | 3535 | 90 | 3½" | 3 | 187 | 36.0 | 89 | 62.0 | | | |
| 008C0200 | | 8 | 3535 | 90 | 3½" | 3 | 213 | 46.0 | 89 | 78.0 | | | |
| 003C0212 | | 212 | 3 | 3020 | 75 | 3" | 3 | 85 | 17.0 | 51 | | 17.0 | 221.6 |
| 004C0212 | | | 4 | 3020 | 75 | 3" | 3 | 111 | 30.0 | 51 | | 30.0 | |
| 005C0212 | 5 | | 3535 | 90 | 3½" | 3 | 136 | 16.0 | 89 | 31.0 | | | |
| 006C0212 | 6 | | 3535 | 90 | 3½" | 3 | 162 | 36.5 | 89 | 36.5 | | | |
| 007C0212 | 7 | | 3535 | 90 | 3½" | 3 | 187 | 36.0 | 89 | 62.0 | | | |
| 008C0212 | 8 | | 3535 | 90 | 3½" | 3 | 213 | 46.0 | 89 | 78.0 | | | |
| For use with 'C' / 'SPC' Section Belts | | | | | | | | | | | | | |
| 003C0224 | 224 | | 3 | 3020 | 75 | 3" | 3 | 85 | 17.0 | 51 | 17.0 | 233.6 | |
| 004C0224 | | 4 | 3535 | 90 | 3½" | 3 | 111 | 11.0 | 89 | 11.0 | | | |
| 005C0224 | | 5 | 3535 | 90 | 3½" | 3 | 136 | 23.5 | 89 | 23.5 | | | |
| 006C0224 | | 6 | 3535 | 90 | 3½" | 3 | 162 | 36.5 | 89 | 36.5 | | | |
| 008C0224 | | 7 | 3535 | 90 | 3½" | 3 | 187 | 36.0 | 89 | 62.0 | | | |
| 008C0224 | | 8 | 3535 | 90 | 3½" | 3 | 213 | 46.0 | 89 | 78.0 | | | |
| 003C0236 | 236 | 3 | 3020 | 75 | 3" | 3 | 85 | 17.0 | 51 | 17.0 | 245.6 | | |
| 004C0236 | | 4 | 3535 | 90 | 3½" | 3 | 111 | 11.0 | 89 | 11.0 | | | |
| 005C0236 | | 5 | 3535 | 90 | 3½" | 3 | 136 | 23.5 | 89 | 23.5 | | | |
| 006C0236 | | 6 | 3535 | 90 | 3½" | 3 | 162 | 36.5 | 89 | 36.5 | | | |
| 007C0236 | | 7 | 3535 | 90 | 3½" | 3 | 187 | 36.0 | 89 | 62.0 | | | |
| 008C0236 | | 8 | 3535 | 90 | 3½" | 3 | 213 | 46.0 | 89 | 78.0 | | | |
| 003C0250 | 250 | 3 | 3020 | 75 | 3" | 3 | 85 | 17.0 | 51 | 17.0 | 259.6 | | |
| 004C0250 | | 4 | 3535 | 90 | 3½" | 3 | 111 | 11.0 | 89 | 11.0 | | | |
| 005C0250 | | 5 | 3535 | 90 | 3½" | 3 | 136 | 23.5 | 89 | 23.5 | | | |
| 006C0250 | | 6 | 3535 | 90 | 3½" | 3 | 162 | 36.5 | 89 | 36.5 | | | |
| 007C0250 | | 7 | 3535 | 90 | 3½" | 3 | 187 | 36.0 | 89 | 62.0 | | | |
| 008C0250 | | 8 | 3535 | 90 | 3½" | 3 | 213 | 62.0 | 89 | 62.0 | | | |
| 010C0250 | | 10 | 4040 | 100 | 4" | 3 | 264 | 81.0 | 102 | 81.0 | | | |
| 003C0265 | 265 | 3 | 3535 | 90 | 3½" | 1 | 85 | | 89 | 4.0 | 274.6 | | |
| 004C0265 | | 4 | 3535 | 90 | 3½" | 3 | 111 | 11.0 | 89 | 11.0 | | | |
| 005C0265 | | 5 | 3535 | 90 | 3½" | 3 | 136 | 23.5 | 89 | 23.5 | | | |
| 006C0265 | | 6 | 3535 | 90 | 3½" | 3 | 162 | 36.5 | 89 | 36.5 | | | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'C' / 'SPC' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|------|------|------|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 007C0265 | 265 | 7 | 3535 | 90 | 3½" | 3 | 187 | 36.0 | 89 | 62.0 | 289.6 |
| 008C0265 | | 8 | 3535 | 90 | 3½" | 3 | 213 | 62.0 | 89 | 62.0 | |
| 010C0265 | | 10 | 4040 | 100 | 4" | 3 | 264 | 81.0 | 102 | 81.0 | |
| 003C0280 | 280 | 3 | 3535 | 90 | 3½" | 1 | 85 | | 89 | 4.0 | |
| 004C0280 | | 4 | 3535 | 90 | 3½" | 3 | 111 | 11.0 | 89 | 11.0 | |
| 005C0280 | | 5 | 3535 | 90 | 3½" | 3 | 136 | 23.5 | 89 | 23.5 | |
| 006C0280 | | 6 | 3535 | 90 | 3½" | 3 | 162 | 36.5 | 89 | 36.5 | |
| 007C0280 | | 7 | 3535 | 90 | 3½" | 3 | 187 | 36.0 | 89 | 62.0 | |
| 008C0280 | | 8 | 3535 | 90 | 3½" | 3 | 213 | 62.0 | 89 | 62.0 | |
| 010C0280 | | 10 | 4040 | 100 | 4" | 3 | 264 | 81.0 | 102 | 81.0 | |
| 003C0300 | 300 | 3 | 3535 | 90 | 3½" | 8 | 85 | 2.0 | 89 | 2.0 | 309.6 |
| 004C0300 | | 4 | 3535 | 90 | 3½" | 7 | 111 | 11.0 | 89 | 11.0 | |
| 005C0300 | | 5 | 3535 | 90 | 3½" | 7 | 136 | 23.5 | 89 | 23.5 | |
| 006C0300 | | 6 | 3535 | 90 | 3½" | 7 | 162 | 36.5 | 89 | 36.5 | |
| 007C0300 | | 7 | 3535 | 90 | 3½" | 7 | 187 | 49.0 | 89 | 49.0 | |
| 008C0300 | | 8 | 4040 | 100 | 4" | 3 | 213 | 55.5 | 102 | 55.5 | |
| 010C0300 | 10 | 4545 | 110 | 4½" | 3 | 264 | 75.0 | 114 | 75.0 | | |
| 003C0315 | 315 | 3 | 3535 | 90 | 3½" | 8 | 85 | 2.0 | 89 | 2.0 | 324.6 |
| 004C0315 | | 4 | 3535 | 90 | 3½" | 7 | 111 | 11.0 | 89 | 11.0 | |
| 005C0315 | | 5 | 3535 | 90 | 3½" | 7 | 136 | 23.5 | 89 | 23.5 | |
| 006C0315 | | 6 | 3535 | 90 | 3½" | 7 | 162 | 36.5 | 89 | 36.5 | |
| 007C0315 | | 7 | 3535 | 90 | 3½" | 7 | 187 | 49.0 | 89 | 49.0 | |
| 008C0315 | | 8 | 4040 | 100 | 4" | 3 | 213 | 55.5 | 102 | 55.5 | |
| 010C0315 | 10 | 4545 | 110 | 4½" | 3 | 264 | 75.0 | 114 | 75.0 | | |
| 003C0335 | 335 | 3 | 3535 | 90 | 3½" | 8 | 85 | 2.0 | 89 | 2.0 | 344.6 |
| 004C0335 | | 4 | 3535 | 90 | 3½" | 7 | 111 | 11.0 | 89 | 11.0 | |
| 005C0335 | | 5 | 3535 | 90 | 3½" | 7 | 136 | 23.5 | 89 | 23.5 | |
| 006C0335 | | 6 | 3535 | 90 | 3½" | 7 | 162 | 36.5 | 89 | 36.5 | |
| 007C0335 | | 7 | 3535 | 90 | 3½" | 7 | 187 | 49.0 | 89 | 49.0 | |
| 008C0335 | | 8 | 4040 | 100 | 4" | 3 | 213 | 55.5 | 102 | 55.5 | |
| 010C0335 | 10 | 4545 | 110 | 4½" | 3 | 264 | 75.0 | 114 | 75.0 | | |
| 003C0355 | 355 | 3 | 3535 | 90 | 3½" | 8 | 85 | 2.0 | 89 | 2.0 | 364.6 |
| 004C0355 | | 4 | 3535 | 90 | 3½" | 7 | 111 | 11.0 | 89 | 11.0 | |
| 005C0355 | | 5 | 3535 | 90 | 3½" | 7 | 136 | 23.5 | 89 | 23.5 | |
| 006C0355 | | 6 | 3535 | 90 | 3½" | 7 | 162 | 36.5 | 89 | 36.5 | |
| 007C0355 | | 7 | 4040 | 100 | 4" | 7 | 187 | 42.5 | 102 | 42.5 | |
| 008C0355 | | 8 | 4040 | 100 | 4" | 7 | 213 | 55.5 | 102 | 55.5 | |
| 010C0355 | | 10 | 4545 | 110 | 4½" | 3 | 264 | 75.0 | 114 | 75.0 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys







For use with 'C' / 'SPC' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) | | |
|--------------|--------------|----------------|----------|-----------|------|-------------|-----|------|------|------|-----------------|-------|-------|
| | | | | Met. | Imp. | | | | | | | | |
| 003C0375 | 375 | 3 | 3535 | 90 | 3½" | 8 | 85 | 2.0 | 89 | 2.0 | 384.6 | | |
| 004C0375 | | 4 | 3535 | 90 | 3½" | 7 | 111 | 11.0 | 89 | 11.0 | | | |
| 005C0375 | | 5 | 3535 | 90 | 3½" | 7 | 136 | 23.5 | 89 | 23.5 | | | |
| 006C0375 | | 6 | 4040 | 100 | 4" | 7 | 162 | 30.0 | 102 | 30.0 | | | |
| 007C0375 | | 7 | 4040 | 100 | 4" | 7 | 187 | 42.5 | 102 | 42.5 | | | |
| 008C0375 | | 8 | 4545 | 110 | 4½" | 7 | 213 | 49.5 | 114 | 49.5 | | | |
| 010C0375 | | 10 | 4545 | 110 | 4½" | 3 | 264 | 75.0 | 114 | 75.0 | | | |
| 003C0400 | | 400 | 3 | 3535 | 90 | 3½" | 8 | 85 | 2.0 | 89 | | 2.0 | 409.6 |
| 004C0400 | | | 4 | 3535 | 90 | 3½" | 5 | 111 | 11.0 | 89 | | 11.0 | |
| 005C0400 | | | 5 | 3535 | 90 | 3½" | 5 | 136 | 23.5 | 89 | | 23.5 | |
| 006C0400 | 6 | | 4040 | 100 | 4" | 7 | 162 | 30.0 | 102 | 30.0 | | | |
| 007C0400 | 7 | | 4545 | 110 | 4½" | 7 | 187 | 36.5 | 114 | 36.5 | | | |
| 008C0400 | 8 | | 4545 | 110 | 4½" | 7 | 213 | 49.5 | 114 | 49.5 | | | |
| 010C0400 | 10 | | 5050 | 125 | 5" | 7 | 264 | 68.5 | 127 | 68.5 | | | |
| 003C0425 | 425 | | 3 | 3535 | 90 | 3½" | 4 | 85 | 2.0 | 89 | 2.0 | 434.6 | |
| 004C0425 | | | 4 | 3535 | 90 | 3½" | 5 | 111 | 11.0 | 89 | 11.0 | | |
| 005C0425 | | | 5 | 4040 | 100 | 4" | 7 | 136 | 17.0 | 102 | 17.0 | | |
| 006C0425 | | 6 | 4545 | 110 | 4½" | 7 | 162 | 24.0 | 114 | 24.0 | | | |
| 007C0425 | | 7 | 4545 | 110 | 4½" | 7 | 187 | 36.5 | 114 | 36.5 | | | |
| 008C0425 | | 8 | 5050 | 125 | 5" | 7 | 213 | 43.0 | 127 | 43.0 | | | |
| 010C0425 | | 10 | 5050 | 125 | 5" | 7 | 264 | 68.5 | 127 | 68.5 | | | |
| 003C0450 | | 450 | 3 | 3535 | 90 | 3½" | 4 | 85 | 2.0 | 89 | 2.0 | | 459.6 |
| 004C0450 | | | 4 | 3535 | 90 | 3½" | 5 | 111 | 11.0 | 89 | 11.0 | | |
| 005C0450 | | | 5 | 4040 | 100 | 4" | 5 | 136 | 17.0 | 102 | 17.0 | | |
| 006C0450 | 6 | | 4545 | 110 | 4½" | 7 | 162 | 24.0 | 114 | 24.0 | | | |
| 007C0450 | 7 | | 5050 | 125 | 5" | 7 | 187 | 30.0 | 127 | 30.0 | | | |
| 008C0450 | 8 | | 5050 | 125 | 5" | 7 | 213 | 43.0 | 127 | 43.0 | | | |
| 010C0450 | 10 | | 5050 | 125 | 5" | 7 | 264 | 68.5 | 127 | 68.5 | | | |
| 003C0475 | 475 | | 3 | 3535 | 90 | 3½" | 4 | 85 | 2.0 | 89 | 2.0 | 484.6 | |
| 004C0475 | | | 4 | 3535 | 90 | 3½" | 5 | 111 | 11.0 | 89 | 11.0 | | |
| 005C0475 | | | 5 | 4040 | 100 | 4" | 5 | 136 | 17.0 | 102 | 17.0 | | |
| 006C0475 | | 6 | 4545 | 110 | 4½" | 7 | 162 | 24.0 | 114 | 24.0 | | | |
| 007C0475 | | 7 | 5050 | 125 | 5" | 7 | 187 | 30.0 | 127 | 30.0 | | | |
| 008C0475 | | 8 | 5050 | 125 | 5" | 7 | 213 | 43.0 | 127 | 43.0 | | | |
| 010C0475 | | 10 | 5050 | 125 | 5" | 7 | 264 | 68.5 | 127 | 68.5 | | | |
| 003C0500 | | 500 | 3 | 3535 | 90 | 3½" | 4 | 85 | 2.0 | 89 | 2.0 | | 509.6 |
| 004C0500 | | | 4 | 3535 | 90 | 3½" | 5 | 111 | 11.0 | 89 | 11.0 | | |
| 005C0500 | | | 5 | 4040 | 100 | 4" | 5 | 136 | 17.0 | 102 | 17.0 | | |

Dimensions in millimetres unless otherwise stated.

Taper Lock® Dual Duty Pulleys







For use with 'C' / 'SPC' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|-----|------|-----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 006C0500 | 500 | 6 | 4545 | 110 | 4½" | 5 | 162 | 24.0 | 114 | 24.0 | |
| 007C0500 | | 7 | 5050 | 125 | 5" | 7 | 187 | 30.0 | 127 | 30.0 | |
| 008C0500 | | 8 | 5050 | 125 | 5" | 7 | 213 | 43.0 | 127 | 43.0 | |
| 010C0500 | | 10 | 5050 | 125 | 5" | 7 | 264 | 68.5 | 127 | 68.5 | |
| 003C0530 | 530 | 3 | 3535 | 90 | 3½" | 4 | 85 | 2.0 | 89 | 2.0 | 539.6 |
| 004C0530 | | 4 | 4040 | 100 | 4" | 5 | 111 | 4.5 | 102 | 4.5 | |
| 005C0530 | | 5 | 4545 | 110 | 4½" | 5 | 136 | 11.0 | 114 | 11.0 | |
| 006C0530 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 006C0530 | | 7 | 5050 | 125 | 5" | 7 | 187 | 30.0 | 127 | 30.0 | |
| 008C0530 | | 8 | 5050 | 125 | 5" | 7 | 213 | 43.0 | 127 | 43.0 | |
| 010C0530 | | 10 | 5050 | 125 | 5" | 7 | 264 | 68.5 | 127 | 68.5 | |
| 003C0560 | 560 | 3 | 3535 | 90 | 3½" | 4 | 85 | 2.0 | 89 | 2.0 | |
| 004C0560 | | 4 | 4040 | 100 | 4" | 5 | 111 | 4.5 | 102 | 4.5 | |
| 005C0560 | | 5 | 4545 | 110 | 4½" | 5 | 136 | 11.0 | 114 | 11.0 | |
| 006C0560 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C0560 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30.0 | |
| 008C0560 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43.0 | |
| 010C0560 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |
| 003C0600 | 600 | 3 | 4040 | 100 | 4" | 4 | 85 | 8.5 | 102 | 8.5 | 609.6 |
| 004C0600 | | 4 | 4545 | 110 | 4½" | 4 | 111 | 1.5 | 114 | 1.5 | |
| 005C0600 | | 5 | 4545 | 110 | 4½" | 5 | 136 | 11.0 | 114 | 11.0 | |
| 006C0600 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C0600 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30.0 | |
| 006C0600 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43.0 | |
| 010C0600 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |
| 003C0630 | 630 | 3 | 4545 | 110 | 4½" | 4 | 85 | 14.5 | 114 | 14.5 | |
| 004C0630 | | 4 | 4545 | 110 | 4½" | 4 | 111 | 1.5 | 114 | 1.5 | |
| 005C0630 | | 5 | 5050 | 125 | 5" | 5 | 136 | 4.5 | 127 | 4.5 | |
| 006C0630 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C0630 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30.0 | |
| 008C0630 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43.0 | |
| 010C0630 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |
| 003C0710 | 710 | 3 | 4545 | 110 | 4½" | 4 | 85 | 14.5 | 114 | 14.5 | 719.6 |
| 004C0710 | | 4 | 4545 | 110 | 4½" | 4 | 111 | 1.5 | 114 | 1.5 | |
| 005C0710 | | 5 | 5050 | 125 | 5" | 5 | 136 | 4.5 | 127 | 4.5 | |
| 006C0710 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C0710 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30.0 | |
| 006C0710 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43.0 | |
| 010C0710 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys



For use with 'C' / 'SPC' Section Belts

| Product Code | Pitch Dia(P) | No. of Grooves | Bush No. | Max. Bore | | Pulley Type | F | K | L | M | Outside Dia (O) |
|--------------|--------------|----------------|----------|-----------|------|-------------|-----|------|-----|------|-----------------|
| | | | | Met. | Imp. | | | | | | |
| 003C0762 | 762 | 3 | 4545 | 110 | 4½" | 4 | 85 | 14.5 | 114 | 14.5 | 771.6 |
| 004C0762 | | 4 | 4545 | 110 | 4½" | 4 | 111 | 1.5 | 114 | 1.5 | |
| 005C0762 | | 5 | 5050 | 125 | 5" | 5 | 136 | 4.5 | 127 | 4.5 | |
| 006C0762 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C0762 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30.0 | |
| 006C0762 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43.0 | |
| 010C0762 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |
| 003C0800 | 800 | 3 | 5050 | 125 | 5" | 4 | 85 | 21.0 | 127 | 21.0 | 809.6 |
| 004C0800 | | 4 | 5050 | 125 | 5" | 4 | 111 | 8.0 | 127 | 8.0 | |
| 005C0800 | | 5 | 5050 | 125 | 5" | 5 | 136 | 4.5 | 127 | 4.5 | |
| 006C0800 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C0800 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30.0 | |
| 008C0800 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43.0 | |
| 010C0800 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |
| 003C0900 | 900 | 3 | 5050 | 125 | 5" | 4 | 85 | 21.0 | 127 | 21.0 | 909.6 |
| 004C0900 | | 4 | 5050 | 125 | 5" | 4 | 111 | 8.0 | 127 | 8.0 | |
| 005C0900 | | 5 | 5050 | 125 | 5" | 5 | 136 | 4.5 | 127 | 4.5 | |
| 006C0900 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C0900 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30.0 | |
| 008C0900 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43.0 | |
| 010C0900 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |
| 003C1000 | 1000 | 3 | 5050 | 125 | 5" | 4 | 85 | 21.0 | 127 | 21.0 | 1009.6 |
| 004C1000 | | 4 | 5050 | 125 | 5" | 4 | 111 | 8.0 | 127 | 8.0 | |
| 005C1000 | | 5 | 5050 | 125 | 5" | 5 | 136 | 4.5 | 127 | 4.5 | |
| 006C1000 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C1000 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30.0 | |
| 008C1000 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43.0 | |
| 010C1000 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |
| 003C1250 | 1250 | 3 | 5050 | 125 | 5" | 4 | 85 | 21.0 | 127 | 21 | 1259.6 |
| 004C1250 | | 4 | 5050 | 125 | 5" | 4 | 111 | 8.0 | 127 | 8 | |
| 005C1250 | | 5 | 5050 | 125 | 5" | 5 | 136 | 4.5 | 127 | 4.5 | |
| 006C1250 | | 6 | 5050 | 125 | 5" | 5 | 162 | 17.5 | 127 | 17.5 | |
| 007C1250 | | 7 | 5050 | 125 | 5" | 5 | 187 | 30.0 | 127 | 30 | |
| 008C1250 | | 8 | 5050 | 125 | 5" | 5 | 213 | 43.0 | 127 | 43 | |
| 010C1250 | | 10 | 5050 | 125 | 5" | 5 | 264 | 68.5 | 127 | 68.5 | |

Dimensions in millimetres unless otherwise stated.

F Taper Lock® Dual Duty Pulleys



IMPERIAL BORES AND KEYWAYS

Dimensions In Inches

| Bore Dia. | Keyway | | Shallow Keyway Depth | 1008 | 1108 | 1210 | 1215 | 1310 | 1610 | 1615 | 2012 | 2517 | 2525 | 3020 | 3030 | 3525 | 3535 | 4040 | 4545 | 5050 | |
|---|--------|-------|----------------------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|------|
| | Width | Depth | | | | | | | | | | | | | | | | | | | |
| 0.375 | 0.125 | 0.060 | | 0375 | 0375 | | | | | | | | | | | | | | | | |
| 0.500 | 0.125 | 0.060 | | 0500 | 0500 | 0500 | 0500 | 0500 | 0500 | 0500 | | | | | | | | | | | |
| 0.625 | 0.188 | 0.088 | | 0625 | 0625 | 0625 | 0625 | 0625 | 0625 | 0625 | | | | | | | | | | | |
| 0.750 | 0.188 | 0.088 | | 0750 | 0750 | 0750 | 0750 | 0750 | 0750 | 0750 | 0750 | 0750 | | | | | | | | | |
| 0.875 | 0.250 | 0.115 | | 0875 | 0875 | 0875 | 0875 | 0875 | 0875 | 0875 | 0875 | 0875 | 0875 | | | | | | | | |
| 1.000 | 0.250 | 0.115 | 0.052 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | | | | | | | |
| 1.125 | 0.312 | 0.112 | 0.064 | | 1125 | 1125 | 1125 | 1125 | 1125 | 1125 | 1125 | 1125 | 1125 | 1125 | | | | | | | |
| 1.250 | 0.312 | 0.112 | | | | 1250 | 1250 | 1250 | 1250 | 1250 | 1250 | 1250 | 1250 | 1250 | 1250 | | | | | | |
| 1.375 | 0.375 | 0.108 | | | | | | 1375 | 1375 | 1375 | 1375 | 1375 | 1375 | 1375 | 1375 | | | | | | |
| 1.500 | 0.375 | 0.108 | | | | | | | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | | | | |
| 1.625 | 0.438 | 0.135 | 0.103 | | | | | | 1625 | 1625 | 1625 | 1625 | 1625 | 1625 | 1625 | 1625 | 1625 | 1625 | | | |
| 1.750 | 0.438 | 0.135 | | | | | | | | | 1750 | 1750 | 1750 | 1750 | 1750 | 1750 | 1750 | 1750 | 1750 | | |
| 1.875 | 0.500 | 0.131 | | | | | | | | | 1875 | 1875 | 1875 | 1875 | 1875 | 1875 | 1875 | 1875 | 1875 | | |
| 2.000 | 0.500 | 0.131 | | | | | | | | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | | |
| 2.125 | 0.625 | 0.185 | | | | | | | | | 2125 | 2125 | 2125 | 2125 | 2125 | 2125 | 2125 | 2125 | | | |
| 2.250 | 0.625 | 0.185 | | | | | | | | | 2250 | 2250 | 2250 | 2250 | 2250 | 2250 | 2250 | 2250 | 2250 | | |
| 2.375 | 0.625 | 0.185 | | | | | | | | | 2375 | 2375 | 2375 | 2375 | 2375 | 2375 | 2375 | 2375 | 2375 | | |
| 2.500 | 0.625 | 0.185 | 0.153 | | | | | | | | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | | |
| 2.625 | 0.750 | 0.209 | | | | | | | | | | | 2625 | 2625 | 2625 | 2625 | 2625 | 2625 | 2625 | | |
| 2.750 | 0.750 | 0.209 | | | | | | | | | | | | 2750 | 2750 | 2750 | 2750 | 2750 | 2750 | 2750 | |
| 2.875 | 0.750 | 0.209 | | | | | | | | | | | | 2875 | 2875 | 2875 | 2875 | 2875 | 2875 | 2875 | |
| 3.000 | 0.750 | 0.209 | | | | | | | | | | | | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 | |
| 3.125 | 0.875 | 0.264 | | | | | | | | | | | | | 3125 | 3125 | 3125 | 3125 | 3125 | 3125 | |
| 3.250 | 0.875 | 0.264 | | | | | | | | | | | | | 3250 | 3250 | 3250 | 3250 | 3250 | 3250 | |
| 3.375 | 0.875 | 0.264 | | | | | | | | | | | | | 3375 | 3375 | 3375 | 3375 | 3375 | 3375 | |
| 3.500 | 0.875 | 0.264 | | | | | | | | | | | | | 3500 | 3500 | 3500 | 3500 | 3500 | 3500 | |
| 3.750 | 1.000 | 0.318 | | | | | | | | | | | | | | | 3750 | 3750 | 3750 | 3750 | |
| 4.000 | 1.000 | 0.318 | | | | | | | | | | | | | | | | 4000 | 4000 | 4000 | |
| 4.250 | 1.250 | 0.366 | | | | | | | | | | | | | | | | | 4250 | 4250 | |
| 4.500 | 1.250 | 0.366 | | | | | | | | | | | | | | | | | | 4500 | |
| 4.750 | 1.250 | 0.366 | | | | | | | | | | | | | | | | | | | 4750 |
| 5.000 | 1.250 | 0.366 | | | | | | | | | | | | | | | | | | | 5000 |
| Nominal dia at large end of Taper (in mm) Approx. | | | | 35.0 | 38.0 | 47.5 | 47.5 | 51.0 | 57.0 | 57.0 | 70.0 | 85.5 | 85.5 | 108.0 | 108.0 | 127.0 | 127.0 | 146.0 | 162.0 | 177.5 | |
| Mass of Bush (Kg) | | | | 0.1 | 0.1 | 0.2 | 0.3 | 0.3 | 0.3 | 0.5 | 0.7 | 1.5 | 1.9 | 2.7 | 3.6 | 3.8 | 5.0 | 7.7 | 10 | 14 | |



Keyways are British Standard Imperial B.S. : 10 : Part 1:1972 and conform to I.S.O. recommendations except for the bore sizes marked* which are shallower. Where a key is to be used it should be parallel and side fitting with top clearance. Depth of keyway is measured at CROWN.
 Note : Taper-Lock® Bushes with imperial bores can also be supplied as 'specials' subject to minimum quantity restrictions. Consult Fenner.

Taper Lock® Dual Duty Pulleys



METRIC BORES AND KEYWAYS

Dimensions In millimeters

| Bore Dia. | Keyway | | Shallow Keyway Depth | Catalogue Code Group 029 ... | | | | | | | | | | | | | | | | |
|---|--------|-------|----------------------|------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| | Width | Depth | | 1008 AO | 1108 BO | 1210 CO | 1215 DO | 1310 EO | 1610 GO | 1615 HO | 2012 KO | 2517 MO | 2525 NO | 3020 PO | 3030 QO | 3525 JO | 3535 RO | 4040 SO | 4545 TO | 5050 UO |
| 9 | 3 | 1.4 | - | ...009 | 009 | | | | | | | | | | | | | | | |
| 10 | 3 | 1.4 | - | ...010 | 010 | | | | | | | | | | | | | | | |
| 11 | 4 | 1.8 | - | ...011 | 011 | 011 | 011 | | | | | | | | | | | | | |
| 12 | 4 | 1.8 | - | ...012 | 012 | 012 | 012 | | | | | | | | | | | | | |
| 14 | 5 | 2.3 | - | ...014 | 014 | 014 | 014 | 014 | 014 | 014 | 014 | | | | | | | | | |
| 16 | 5 | 2.3 | - | ...016 | 016 | 016 | 016 | 016 | 016 | 016 | 016 | 016 | | | | | | | | |
| 18 | 6 | 2.8 | - | ...018 | 018 | 018 | 018 | 018 | 018 | 018 | 018 | 018 | | | | | | | | |
| 19 | 6 | 2.8 | - | ...019 | 019 | 019 | 019 | 019 | 019 | 019 | 019 | 019 | 019 | | | | | | | |
| 20 | 6 | 2.8 | - | ...020 | 020 | 020 | 020 | 020 | 020 | 020 | 020 | 020 | 020 | | | | | | | |
| 22 | 6 | 2.8 | - | ...022 | 022 | 022 | 022 | 022 | 022 | 022 | 022 | 022 | 022 | | | | | | | |
| 24 | 8 | 3.3 | 1.3 | ...024* | 024 | 024 | 024 | 024 | 024 | 024 | 024 | 024 | 024 | | | | | | | |
| 25 | 8 | 3.3 | 1.3 | ...025* | 025 | 025 | 025 | 025 | 025 | 025 | 025 | 025 | 025 | 025 | | | | | | |
| 28 | 8 | 3.3 | 1.3 | | 028* | 028 | 028 | 028 | 028 | 028 | 028 | 028 | 028 | 028 | | | | | | |
| 30 | 8 | 3.3 | - | | | 030 | 030 | 030 | 030 | 030 | 030 | 030 | 030 | 030 | | | | | | |
| 32 | 10 | 3.3 | 1.3 | | | 032* | 032* | 032 | 032 | 032 | 032 | 032 | 032 | 032 | | | | | | |
| 35 | 10 | 3.3 | 1.3 | | | | | 035* | 035 | 035 | 035 | 035 | 035 | 035 | 035 | 035 | 035 | | | |
| 38 | 10 | 3.3 | - | | | | | | 038 | 038 | 038 | 038 | 038 | 038 | 038 | 038 | 038 | | | |
| 40 | 12 | 3.3 | 1.3 | | | | | | 040* | 040* | 040 | 040 | 040 | 040 | 040 | 040 | 040 | 040 | | |
| 42 | 12 | 3.3 | 1.3 | | | | | | 042* | 042* | 042 | 042 | 042 | 042 | 042 | 042 | 042 | 042 | | |
| 45 | 14 | 3.8 | - | | | | | | | | 045 | 045 | 045 | 045 | 045 | 045 | 045 | 045 | | |
| 48 | 14 | 3.8 | - | | | | | | | | 048 | 048 | 048 | 048 | 048 | 048 | 048 | 048 | | |
| 50 | 14 | 3.8 | 2.8 | | | | | | | 050* | 050 | 050 | 050 | 050 | 050 | 050 | 050 | 050 | | |
| 55 | 16 | 4.3 | - | | | | | | | | | 055 | 055 | 055 | 055 | 055 | 055 | 055 | 055 | 055 |
| 60 | 18 | 4.4 | - | | | | | | | | | | 060 | 060 | 060 | 060 | 060 | 060 | 060 | 060 |
| 65 | 18 | 4.4 | - | | | | | | | | | | | 065 | 065 | 065 | 065 | 065 | 065 | 065 |
| 70 | 20 | 4.9 | - | | | | | | | | | | | | 070 | 070 | 070 | 070 | 070 | 070 |
| 75 | 20 | 4.9 | - | | | | | | | | | | | | | 075 | 075 | 075 | 075 | 075 |
| 80 | 22 | 5.4 | - | | | | | | | | | | | | | | 080 | 080 | 080 | 080 |
| 85 | 22 | 5.4 | - | | | | | | | | | | | | | | | 085 | 085 | 085 |
| 90 | 25 | 5.4 | 3.4 | | | | | | | | | | | | | | | | 090* | 090 |
| 95 | 25 | 5.4 | - | | | | | | | | | | | | | | | | | 095 |
| 100 | 28 | 6.4 | 5.4 | | | | | | | | | | | | | | | | | 100* |
| 105 | 28 | 6.4 | - | | | | | | | | | | | | | | | | | 105 |
| 110 | 28 | 6.4 | - | | | | | | | | | | | | | | | | | 110 |
| 115 | 32 | 7.4 | - | | | | | | | | | | | | | | | | | 115 |
| 120 | 32 | 7.4 | - | | | | | | | | | | | | | | | | | 120 |
| 125 | 32 | 7.4 | - | | | | | | | | | | | | | | | | | 125 |
| Nominal dia at large end of Taper (in mm) Approx. | | | | 35.0 | 38.0 | 47.5 | 47.5 | 51.0 | 57.0 | 57.0 | 70.0 | 85.5 | 85.5 | 108.0 | 108.0 | 127.0 | 127.0 | 146.0 | 162.0 | 177.5 |
| Mass of Bush (Kg) | | | | 0.1 | 0.1 | 0.2 | 0.3 | 0.3 | 0.3 | 0.5 | 0.7 | 1.5 | 1.9 | 2.7 | 3.6 | 3.8 | 5.0 | 7.7 | 10 | 14 |



Keyways are British Standard Metric B.S. 4235: Part 1:1972 and conform to I.S.O. recommendations except for the bore sizes marked * which are shallower. Where a key is to be used it should be parallel and side fitting with top clearance. Depth of keyway is measured at CENTRE.

Note : Taper-Lock® Bushes with imperial bores can also be supplied. Please consult Fenner.